

# WIRE ROPE INSPECTION

14

Inspection | Handling | Installation | Maintenance | Engineering



**UNIROPE**  
**SLINGMAX**  
WIRE ROPE & RIGGING PRODUCTS

1956





2019

Serving Canadian Industry  
for over 63 years

## Products & Services

Wire Rope Inch, Metric, Overhead  
Python® High Performance Ropes  
Python Compac® Non-Rotating Wire Rope  
Uni-Loc® Assemblies  
Gator-Flex® 9-part Wire Rope Slings  
Tri-Flex® 3-part Wire Rope Slings  
Rigger's Choice® Grade 80/100 Chain Slings  
Gripper® Wire Mesh Slings  
Uni-Web® Synthetic Web Slings  
Uni-Path® Polyester Round Slings  
Twin-Path® High Performance Slings  
Attachments Clamps, Beams, Scales  
Fittings Crosby, RUD, Green Pin  
Inspection Chain, Wire Rope, Slings ....  
Proof Testing ASTM E4, Lloyd's Register



©Uniropo Limited, 2014 Version 06/2014

Concept: Uniropo Limited Layout: Uniropo Limited Graphics: Uniropo Limited, Construction Safety Association, Wire Rope Users Manual.

Printing: Printed Matter, Inc. Printed in Canada

Reprint or copying, also partially, only with WRITTEN authorization of Uniropo Limited, Mississauga, Canada.

No responsibility is assumed or implied for any printing error. We reserve the right to change at any time any technical specification, recommendations, or any other data contained in this catalogue.






Parts of this Inspection manual are based on:

"RIGGING MANUAL" published by the Construction safety Association of Ontario, 21 Voyager Court South, Etobicoke, ON. M9W 5M7, Canada

"WIRE ROPE USERS MANUAL" published by the 'Wire Rope Technical Board', PO Box 266, Woodstock, Maryland, 21163-0286, USA

Some of the content of both publications was adopted to incorporate Python® wire rope, Uniropo® and VDW specifications. For a complete discussion on the subject on wire rope we highly recommend both publications. In addition, the 'Construction Safety Association of Ontario' has published a 'Construction Health & Safety Manual', a 'Crane Handbook' and a 'Mobile Crane Manual'. To order these publications please write to the above mentioned organizations, or call Uniropo Limited.

UNIROPE, PYTHON, UNI-LOC, UNI-WEB, UNILLOY, UNI-PATH, UNI-LINK, RIGGER'S CHOICE, COMPAC, DOPAR are Registered Trademarks of Uniropo Limited  
SLINGMAX, TWIN-PATH, TUFF-PATH, GATOR-FLEX, TRI-FLEX, GATOR-MAX, are Registered Trademarks of I&I Sling/SlingMax Inc., Aston, PA, USA

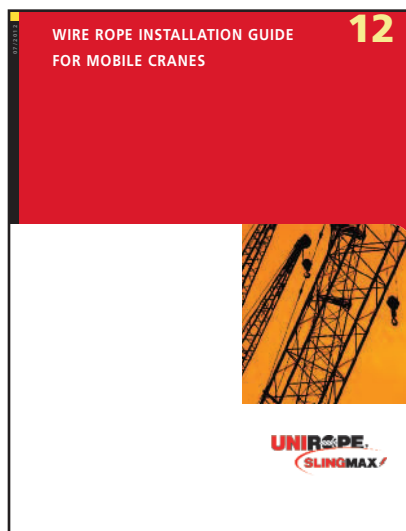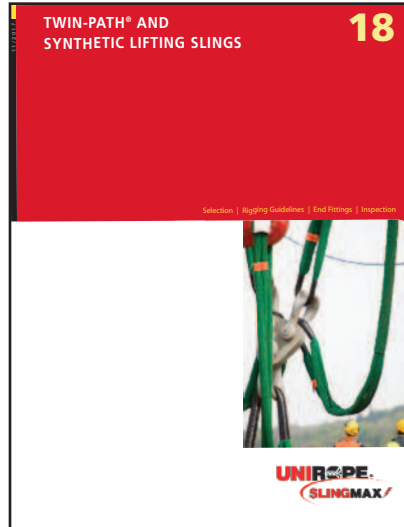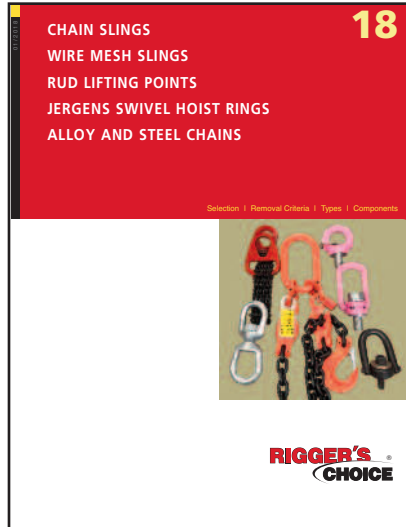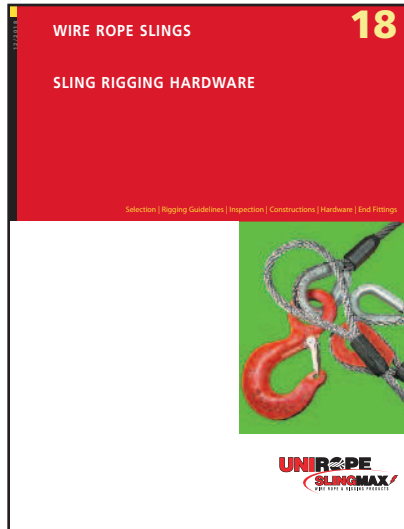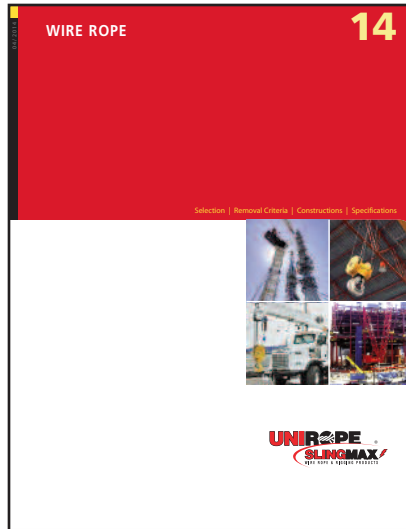

## Table of Contents

Use and Care of Wire Rope	2
Wire Rope is a Machine	3
<b>INSTALLATION OF WIRE ROPE</b>	
Foreword, Measuring the rope diameter	4
If you have to cut a rope	5
Unreeling the rope	6
Connecting the old rope to the new rope	7
Rope lay direction versus Drum Grooving	8
Winding on to the drum	9
Installation of Wedge Sockets	10
Using your rope for the first time	11
Efficiency ratings of end connections	12
<b>INSPECTION OF WIRE ROPE</b>	
How to inspect Wire Rope	13
Crown- and Valley Wire Breaks	14
ASME Discard Tables, Multi Layer Damages	15
ISO 4309-2010 Discard Tables	16-17
Reduction of Diameter, Rope Wear	18
Rope Stretch, Core Wire breaks	19
Mechanical damages	20
Corrosion, Rope Removal and Cause	21
<b>MAINTENANCE</b>	
Inspection of Sheaves and Drums	22
Dimension of Groove Radius	22
Cut and Slip Procedure	23
Lubrication	23
<b>ROPE DATA</b>	
Sheave and Drum Dimensions	24
Relative Service Life	25
Loss of Strength over Pins	25
Why Multistrand Ropes	25
PYTHON™ Wire Rope Constructions	26
and Applications	27

## WARNING

Any warranties, expressed or implied, concerning the use of Wire Rope Products apply to the minimum breaking strength of new, unused Wire Rope when tested in a standard testing machine, under controlled conditions, in direct tension, with both ends fixed to prevent rotation under load, and at a uniform rate of speed. The Terms 'Working Load Limit (WLL)', 'Capacity', 'Minimum Breaking Strength', 'Nominal Breaking Strength', or 'Acceptance Strength' contains no implication of what load a Wire Rope will withstand if not properly used, or if it suffers abuse. All equipment using Wire Rope must be properly maintained. Wire Rope and their attached hardware must be properly stored, handled, used and maintained. Most importantly, Wire Rope and their attached hardware must be regularly inspected before and during each use. Inspections must meet local, or applicable national safety regulations. Damage, abuse, overloading, or improper maintenance can cause failure and accidents. Wire Rope removal criteria are based on steel sheaves. If synthetic sheaves are used, consult the sheave manufacturer. If in doubt about the safe and proper use of these products consult Uniropelimited 1.800.457.9997

# Use and Care of Wire Rope

## Some Things Every User Should Know About Use and Care of Wire Rope

What follows is a brief outline of the basic information required to safely use wire rope

1. Wire rope WILL FAIL IF WORN OUT, OVERLOADED, MISUSED, DAMAGED, or IMPROPERLY MAINTAINED.
2. In service, wire rope loses strength and work capability. Abuse and misuse increase the rate of loss.
3. The MINIMUM BREAKING STRENGTH of wire rope applies ONLY to a NEW, UNUSED rope.
4. The Minimum Breaking Strength should be considered the straight line pull with both rope ends fixed to prevent rotation, which will ACTUALLY BREAK a new, UNUSED, rope. The Minimum Breaking Strength of a rope should NEVER BE USED AS ITS WORKING LOAD.
5. To determine the working load of a wire rope, the MINIMUM or NOMINAL Breaking Strength MUST BE REDUCED by a DESIGN FACTOR (formerly called a Safety Factor). The Design Factor will vary depending upon the type of machine and installation, and the work performed. YOU must determine the applicable Design Factor for your use.
8. NEVER 'SHOCK LOAD' a wire rope. A sudden application of force or load can cause both visible external damage (e.g. birdcaging) and internal damage. There is no practical way to estimate the force applied by shock loading a rope. The sudden release of a load can also damage a wire rope.
9. Lubricant is applied to the wires and strands of a wire rope when manufactured. This lubricant is depleted when the rope is in service and should be replaced periodically.
10. Regular, periodic INSPECTIONS of the wire rope, and keeping of PERMANENT RECORDS SIGNED BY A QUALIFIED PERSON, are required by OSHA and other regulatory bodies for almost every rope installation. The purpose of inspection is to determine whether or not a wire rope may continue to be safely used on that application. Inspection criteria, including number and location of broken wires, wear and elongation, have been established by DIN, ISO, CEN, OSHA, ANSI, ASME and other organizations.

### IF IN DOUBT, REPLACE THE ROPE.

For example, a Design Factor of "5" means that the Minimum or Nominal Breaking Strength of the wire rope must be DIVIDED BY FIVE to determine the maximum load that can be applied to the rope system.

Design Factors have been established by DIN, ISO, CEN, OSHA, ANSI, ASME and similar government and industrial organizations.

No wire rope should ever be installed or used without full knowledge and consideration of the Design Factor for the application.

Some inspection criteria on rope, sheaves and drums are outlined further in this brochure.

6. WIRE ROPE WEAR OUT. The strength of a wire rope slightly increases after the break in period, but will decrease over time. When approaching the finite fatigue life span the breaking strength will sharply decrease. Never evaluate the remaining fatigue life of a wire rope by testing a portion of a rope to destruction only. An indepth rope inspection must be part of such evaluations.
7. NEVER overload a wire rope. This means NEVER use the rope where the load applied is greater than the working load determined by dividing the Minimum Breaking Strength of the rope by the appropriate Design Factor.
11. When a wire rope has been removed from service because it is no longer suitable, IT MUST NOT BE RE-USED ON ANOTHER APPLICATION.
12. Every wire rope user should be aware of the fact that each type of fitting attached to a wire rope has a specific efficiency rating which can reduce the working load of a rope assembly or rope system, and this must be given due consideration in determining the capacity of a wire rope system.
13. Some conditions that can lead to problems in a wire rope system include:
  - Sheaves that are too small, worn or corrugated can cause damage to wire rope.
  - Broken wires mean a loss of strength.
  - Kinks permanently damage a wire rope.
  - Environmental factors such as corrosive conditions and heat can damage a wire rope.
  - Lack of lubrication can significantly shorten the useful service life of a wire rope
  - Contact with electrical wire and the resulting arcing will damage a wire rope



## Wire Rope is a Machine

A wire rope is a machine, by dictionary definition: "An assemblage of parts...that transmit forces, motion, and energy one to another in some predetermined manner and to some desired end."

A typical wire rope may contain hundreds of individual wires which are formed and fabricated to operate at close bearing tolerances one to another. When a wire rope bends, each of its many wires slides and adjusts in the bend to accommodate the difference in length between the inside and the outside bend. The sharper bend, the greater movement.

Every wire rope has three basic components:


- (1) The wires which form the strands and collectively provide the rope strength;
- (2) The strands, which are helically around the core; and,
- (3) The core, which forms a foundation for the strands.

The core of wire rope may be an Independent Wire Rope Core (Steel Core, IWRC, SE, or CW), which in many cases is actually a rope in itself. This core provides between 10% and 50% (in non-rotating constructions) of the wire rope's strength.

The greatest difference in wire ropes are found in the number of strands, the construction of strands, the size of the core, and the lay direction of the strand versus the core.

The wires of wire rope are made of high-carbon steel. These carbon steel wires come in various grades. The term "Grade" is used to designate the strength of the wire rope. Rope wires are usually made of 1770 N/mm<sup>2</sup>, 1960 N/mm<sup>2</sup>, or 2160 N/mm<sup>2</sup> steel grades [Approximate equivalents are Improved Plow Steel (IPS), Extra Improved Plow Steel (EIPS) or Extra Extra Improved Plow Steel (EEIPS)]

One cannot determine the Tensile Grade of a wire rope by its feel or appearance. To properly evaluate a rope's tensile grade you must obtain the Grade from your employer or Uniropelimited @ 1.800.457.9997

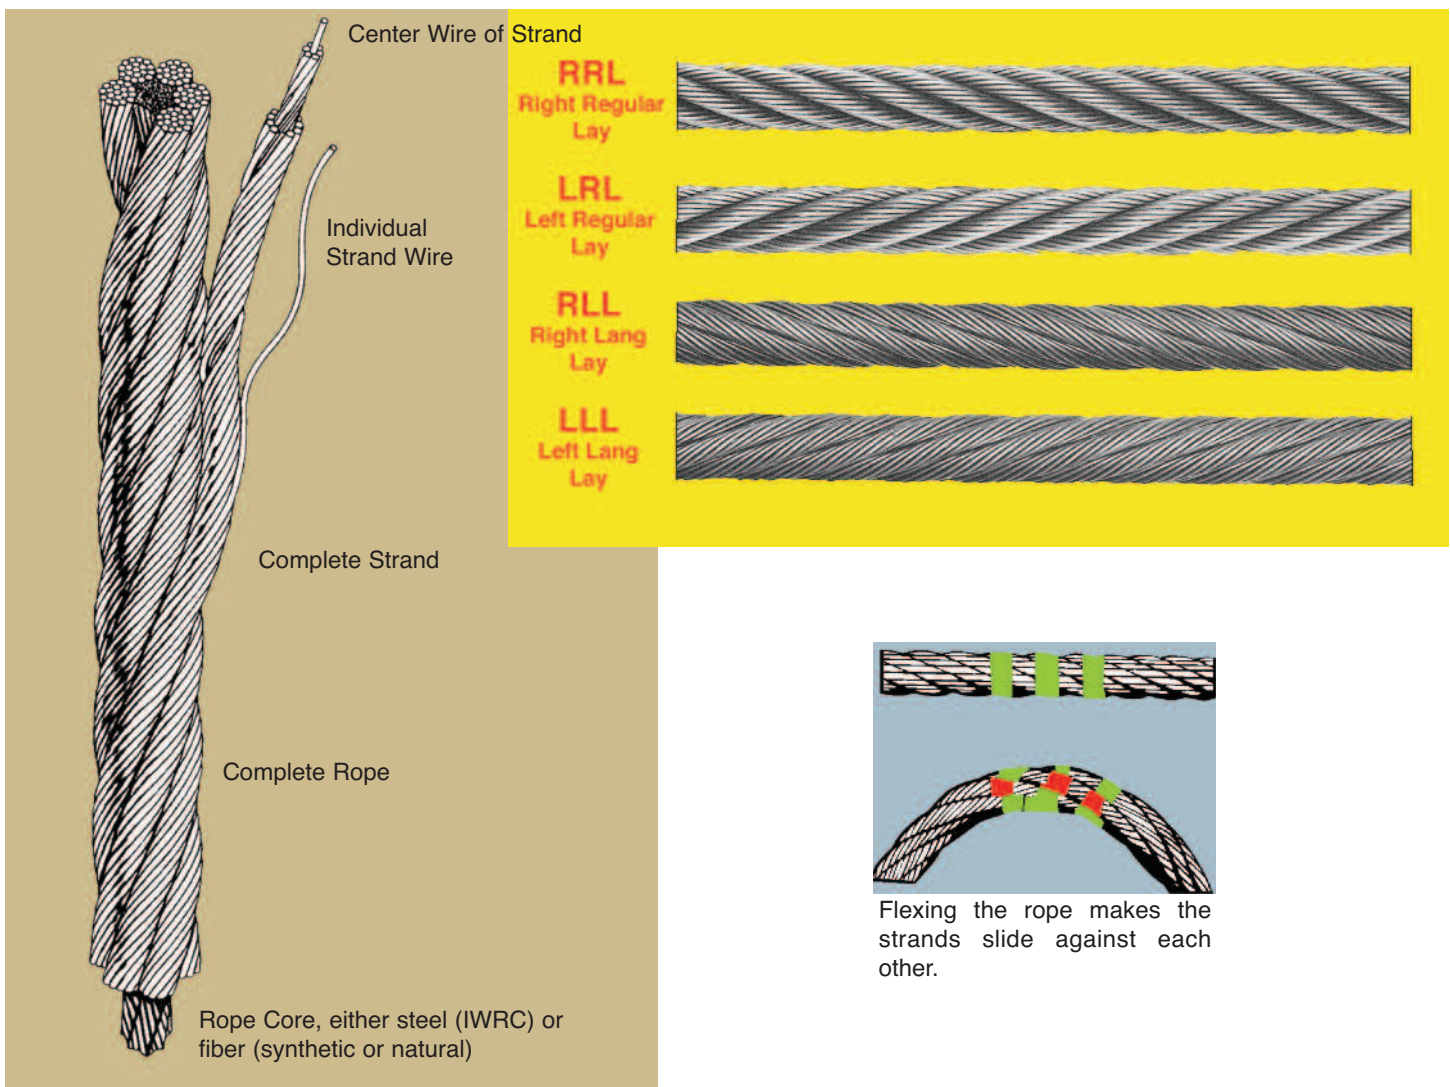

# Installation of Wire Rope

## Foreword

In order to fully achieve the service life potential of Python™ and standard wire rope for demanding crane jobs these step by step instructions should be followed. They are intended to prevent rope damage caused by kinks, untwisting, and loose strands, during handling and installation.

We realize that the 'real world' is not perfect. This applies also to wire rope installation. It is impossible to

cover ALL imaginable installation situations, location difficulties, and crane set ups. You will also find that these instructions are not very different from the installation procedure of 6-strand or 19x7 ropes. Many experienced Riggers may find some of the following "old hat". If you notice any omissions or have ideas that we can incorporate into this brochure we will be most appreciative.

## Measuring the rope diameter



Before you start anything, make sure the diameter of the new rope you are about to install is the correct one for your crane.

Remember that most wire ropes measure slightly over their nominal diameter. Standard rope is allowed to measure up to 5% over their nominal diameter. Some PYTHON® wire rope is made with a maximum 4% tolerance only.

The rope you are going to replace may be worn and may measure less than the rope you are about to install.

**Keep a record of the new rope diameter for future references. You will be asked to determine how much the rope diameter has decreased in service and you MUST know the ACTUAL diameter of the wire rope after the break in period (see page 11).**

When measuring the rope, don't measure the layer on the reel. Pull a couple of feet off the reel and measure the rope when straight. It is advisable to take 4 measurements of the rope round it's axis and average the results.

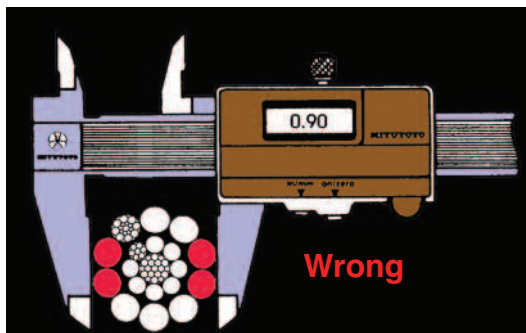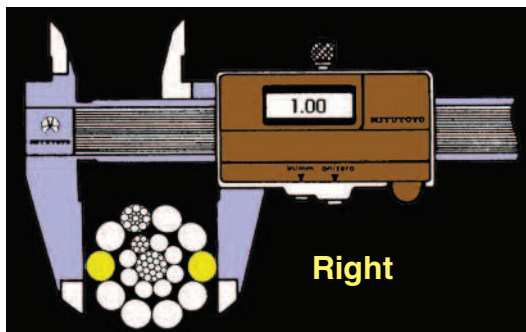

### 4% Diameter Tolerances

Nominal Diameter mm	Maximum Diameter mm	Nominal Diameter inch	Maximum Diameter inch
10	10.40	3/8	.39
11	11.45	7/16	.45
12	12.50	1/2	.52
14	14.55	9/16	.59
15	15.60	5/8	.65
16	16.65	3/4	.78
18	18.70	7/8	.91
20	20.80	1	1.04
22	22.90	1-1/8	1.17
24	25.00	1-1/4	1.30
26	27.05	1-3/8	1.43
28	29.10	1-1/2	1.56
30	31.20	1-5/8	1.69
32	33.30	1-3/4	1.82
34	35.35	1-7/8	1.95
36	37.45	2	2.08

### 5% Diameter Tolerances

Nominal Diameter mm	Maximum Diameter mm	Nominal Diameter inch	Maximum Diameter inch
10	10.50	3/8	.40
11	11.50	7/16	.46
12	12.60	1/2	.53
14	14.70	9/16	.59
15	15.70	5/8	.65
16	16.80	3/4	.79
18	18.90	7/8	.92
20	21.00	1	1.05
22	23.10	1-1/8	1.18
24	25.20	1-1/4	1.31
26	27.30	1-3/8	1.44
28	29.40	1-1/2	1.58
30	31.50	1-5/8	1.71
32	33.60	1-3/4	1.84
34	35.70	1-7/8	1.97
36	37.80	2	2.10

## Installation of Wire Rope

### If you have to cut a rope

Usually, you do not need to re-cut a wire rope. However, you may encounter situations where it becomes necessary to shorten the rope.

Be aware that the following constructions are just lightly preformed and are ALWAYS heat sealed (induction tapering) at the end:

Python® Multi  
 Python® Super 8, Type R, C, and V  
 Python® Power 9, Type R and V  
 Python® Ultra  
 Python® Lift  
 Python® Hoist  
 Python® Compac 35  
 Python® Compac 18  
 19 x 7/19x19 (depending on diameter)  
 34 x 7

The heat seal, which is sometimes coated with a red plastic material, prevents the rope ends from unraveling. Most Python® constructions are NOT preformed. Cutting without proper care WILL result in permanent damage of the rope.

In cutting any wire rope special care MUST be taken in seizing the rope end.

Two methods are suggested:

- 1) Seizing the rope end with soft iron wire.
- 2) Seizing the rope end with hose clamps.


After cutting the rope (see below) it is good practice to braze PYTHON®, 19 x 7, and 34 x 7 rope ends to ensure that they don't unravel. Leave the seizing on the rope for added holding strength. Be careful not to damage the seizing while brazing.

We found that blade cutting a rope gives the best results. Be sure to use a cutting blade suitable for the job (We use cutting blades made by 'PFERD-HORSE' type ELASTIC # 80 EHT 230-2 A 24 SG INOX.) Follow the safety precautions for free hand cutting.

Cutting a rope with a torch may result in both uneven ends and damage to the seizing causing the strands to open up.

Rope diameter up to 14 mm (9/16") may be cut with a FELCO C16 hand cutter.

Easiest method  
with hose clamp




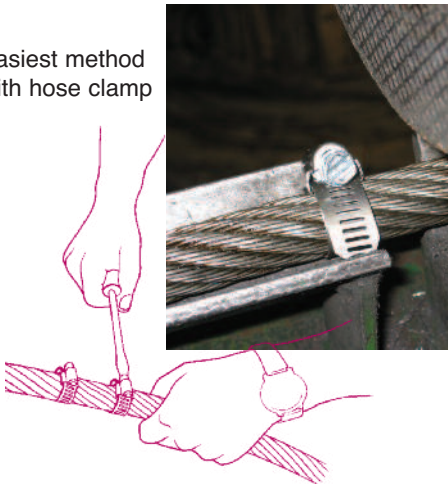


Traditional method with seizing wire

Method A



Method B

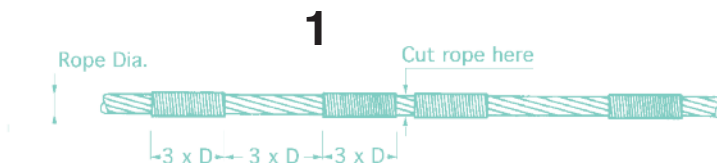

# Installation of Wire Rope

## Unreeling the rope

When removing the rope from the shipping reel or coil, the reel or coil **MUST** rotate as the rope unwinds. Any attempt to unwind a rope from stationary reel or coil **WILL** result in a kinked rope that is ruined beyond repair.

The following illustrations demonstrate the right and wrong way of unreeling a rope.

Special care must be taken **not** to drag the rope over obstacles, over a deflection shaft, or around corners.

Avoid large fleet angles between the shipping reel and the first sheave. The rope may roll in the sheave causing the rope to unlay. This is particularly important for all DoPar-, langs lay, and non-rotating rope constructions.


Avoid reeving the rope through small deflection sheaves and avoid changing the plane from vertical to horizontal direction.

If you have to unspool large and heavy wire rope, use a brake to keep a slight tension on the rope. **NEVER** let the rope go slack and form loops.


All of these precautions apply to Python® as well as to standard 6-strand-, 19x7, 19x19, and 34x7 wire ropes.

If in doubt, contact your nearest Unirop® representative.

### RIGHT

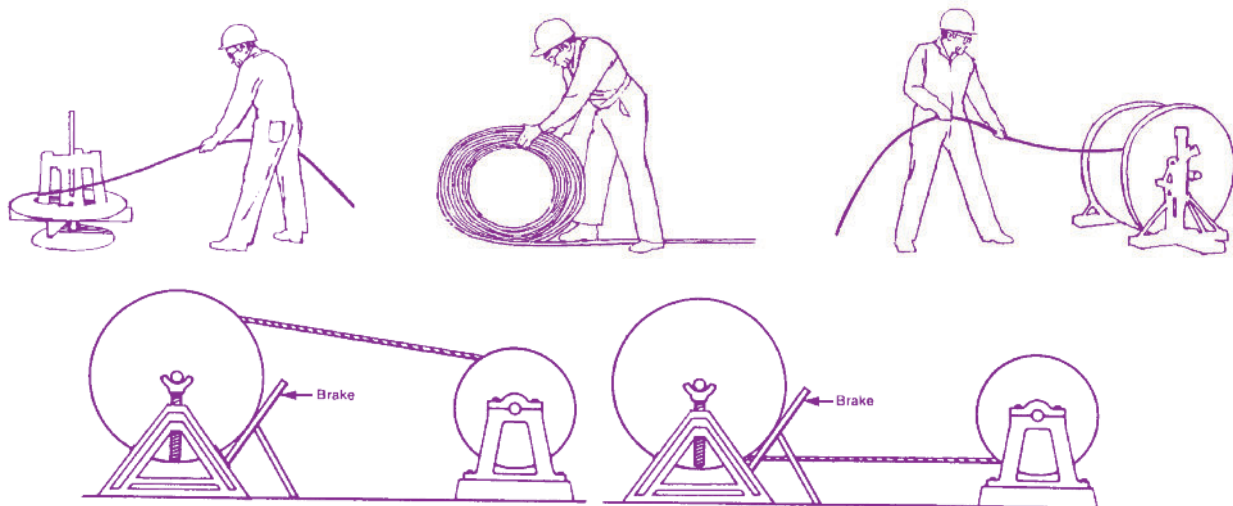

### WRONG

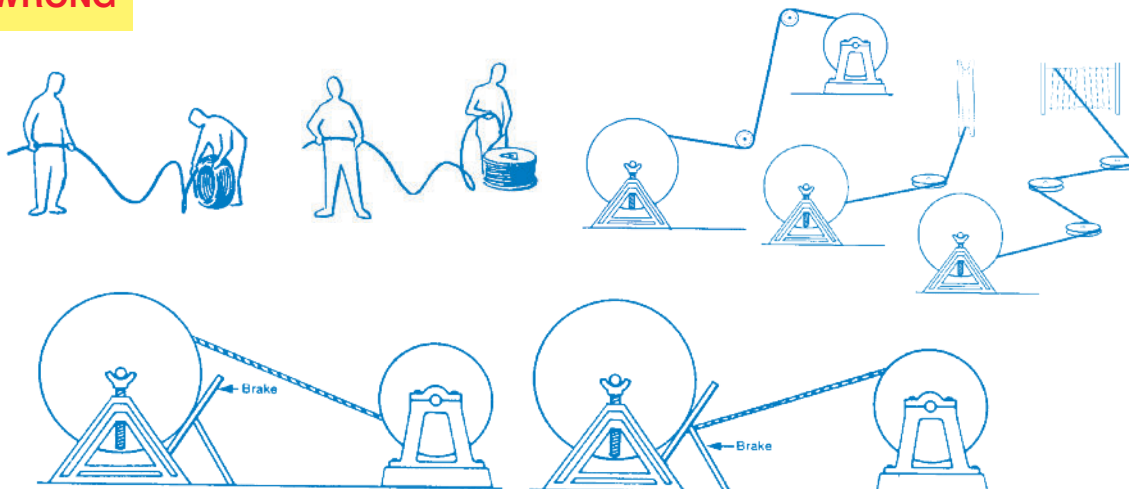



# Installation of Wire Rope

## Connecting the old rope to the new rope

Depending on the type of rope several accepted methods are available.

### Welding

Welding two ropes together is common in the steel industry. If properly done, welding may develop sufficient strength to complete the rope installation. However, the welded portion of the rope is rather stiff, and the welded steel wire material may become brittle. Since the welded portion has to pass over sheaves, there is the danger that the weld may break.

If installing Python® wire rope as well as all non-rotating types we do not recommend the welding procedure. Welding might damage the seizing and the rope may unravel getting damaged beyond repair.

### Becket Loops

A common method for heavy crane rope installations. A steel sleeve only slightly larger than the rope diameter is swaged on to the rope end and a small auxiliary cable protrudes from the sleeve. Either, the old rope is furnished also with a becket loop, or the old rope will be connected to the becket loop with a cable grip.

Factory Induction Welded and Tapered End



Becket Loop End




Wire Rope welded together. Danger of the weld breaking when bent around sheaves.




Two cable grips with eye, connected to two ropes with connecting cable. Use with standard and Python® NON non-rotating rope.



Two cable grips with eye, connected to two ropes with a swivel. Use with non-rotating rope.



One cable grip connected to old rope, becket loop factory installed to new rope.



Open-end cable grip connected to two ropes. Commonly used with a 6-strand rope.



## Use of Cable Grips

The most common method to install a wire rope. The type of cable grip depends on the rope type and construction.

Non-rotating rope must be installed with a swivel between old and new ropes. The old rope may have developed torque during its working life and we must ensure that this torque is not transferred to the new rope.

Python® types Multi and Super 8 may be installed with a swivel. In fact, if you have to change either of these constructions for a 6-strand rope, particularly when this rope has a different lay direction, a swivel is of definite benefit.

Python®-Power 9 and Python® Ultra must not be installed with a swivel. Doing so will unlay the rope and damage it beyond repair. Use two cable grips and connect them with an auxiliary cable.



When using cable grips, the end of the grips have to be tightly seized on to the rope body to prevent accidental slip-out of the rope. Alternately, you may wrap the grip end with a strong reinforced industrial strength adhesive tape.

**NEVER attach a RIGHT hand lay rope to a LEFT hand lay rope**



**either welded together or without a swivel between them !**



# Installation of Wire Rope

## Rope Lay direction versus Drum Grooving






Be sure to use the correct rope lay direction for the drum. This applies to smooth, as well as to grooved drums.

Many crane models have a two sided grooved drum, one part of it is left, the other right lay grooved. Some wire ropes are more sensitive to this type of design than others; it depends on lifting height, frequency of use, and even the rope diameter as to the type of wire rope most suitable for that application.

In some applications it may be advisable to select the rope lay direction according to the most frequently used drum layers (if more than one layer is spooled). If the first rope layer on a drum is used as a 'guide layer' only, it may be advisable to select the rope lay direction according to the second drum layer.

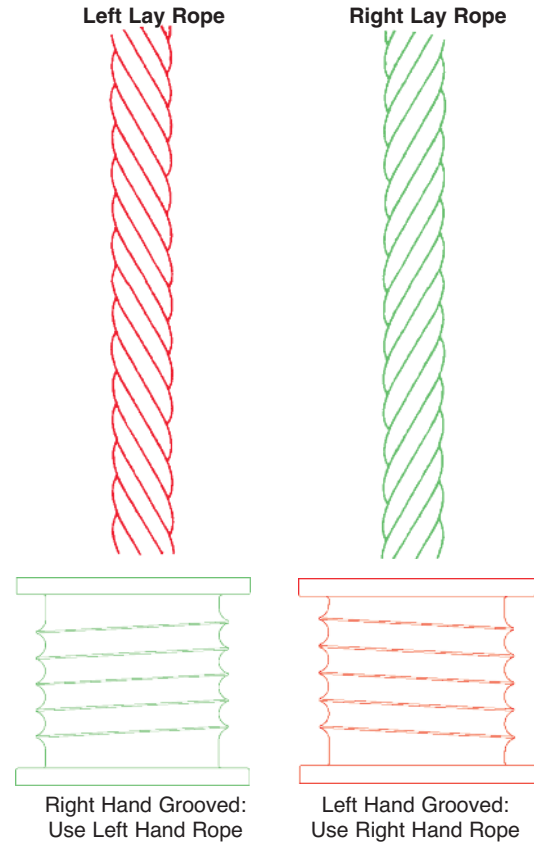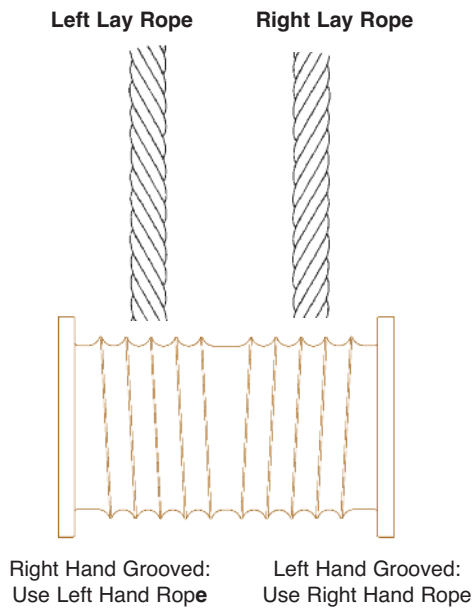

The easiest way to identify correct match between rope and drum is to look alongside the drum axis and the rope axis: the direction of lay/drum groove must be opposite to each other.

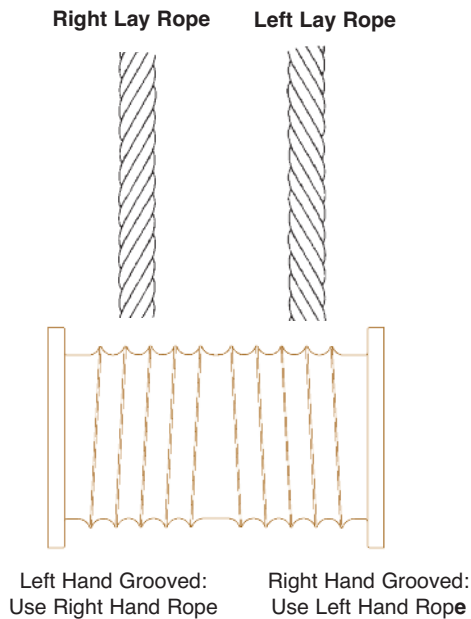

# Installation of Wire Rope

## Winding the rope on to a multiple layer drum system

### Winding on smooth or flat faced drums

Start winding the rope in a straight helix angle. To assist with this, some drums have a tapered steel part attached to one flange which 'fills' the gap between the first turn and the flange (see picture 7).

The first layer must be wound tight and under tension. Take a mallet or a piece of wood and tap the wraps tightly against each other (see picture 1); but not so tight that the rope strands interlock (see picture 2), but tight enough that the rope can't be shifted on the drum. If the first layer is wound too loose, the next layer will wedge a gap into the first layer causing that layer to 'pull in' (see picture 3). A too tightly wrapped first layer will not allow the next layers enough space between wraps (see picture 2).

In any case, the first layer, as well as all of the layers, must be wound on to the drum with sufficient pre-tension (5-10% of the rope's WLL is a good measure). If wound with no tension at all, the rope is subjected to premature crushing and flattening caused by the 'under load' top layers (see picture 4).

Even if wound on properly during installation, the first layer will loosen somewhat during service. When the first layer becomes slack (the pre-tension is gone), this initial procedure **MUST** be repeated in regular intervals.

Otherwise, the tensioned 'hard' wraps will severely crush the bottom layers (picture 5).







### Winding on grooved drums

Basically, follow the same procedure as for smooth drums. Also here, pre-tension is of utmost importance.


If the first layer, or layers, are only used from time to time, they will lose their tension on the drum and start to flatten out due to the high pressures of the loaded layers. Repeat this pre-tensioning procedure regularly.

As with tower cranes, for example, which have a long rope length installed and rise as the building goes up, pre-tensioning will not be possible. In these cases it may be advisable to install a shorter rope length first. Otherwise, you may have to replace the entire rope length because of crushing and flattening of the bottom layers. If this not possible, extra care must be taken to pre-tension the rope on the drum during installation.


Whatever you do, **DO NOT** run the rope through a 'tightening' device (see picture 6), e.g. two wooden blocks clamped together. **YOU WILL DESTROY THE ROPE !**

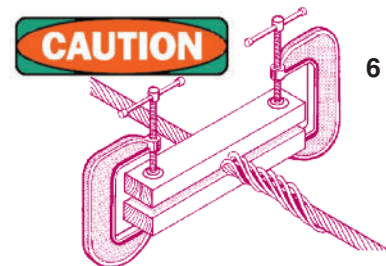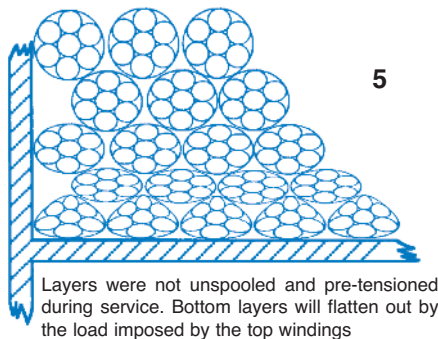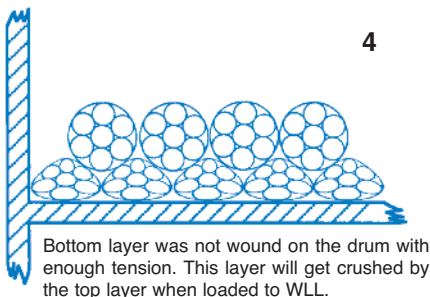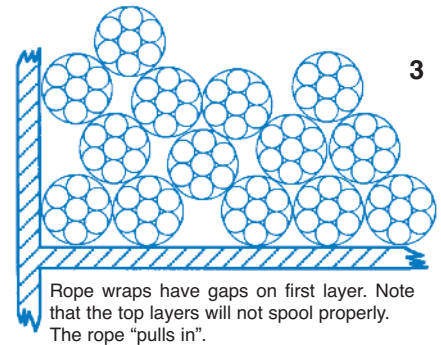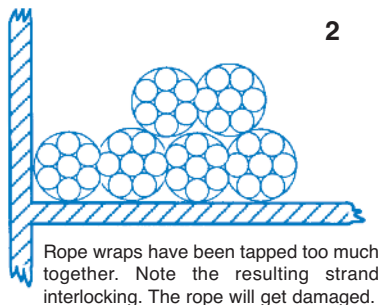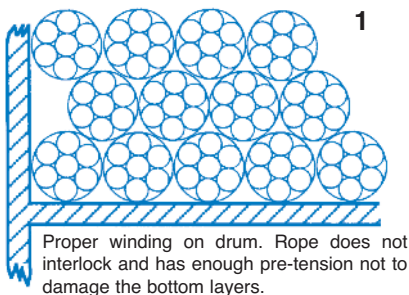


This method of tightening the rope on to the drum **WILL** destroy the rope.

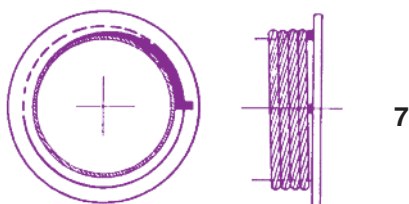

This tapered lifter provides a ramp for the rope to ride up the flange to prevent wedging the rope against the flange and adjacent wraps.



For further information on wire rope installation onto mobile cranes please refer to our Installation Guide.

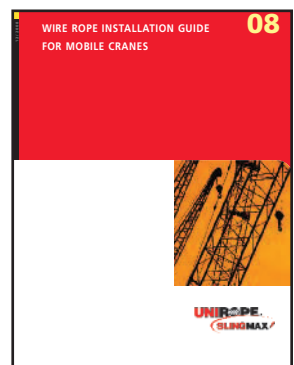




# Installation of Wire Rope

## Wedge Sockets



End terminations with wedge sockets are most popular with tower and mobile cranes although they do not generate as high as an strength efficiency rating as swaged sleeves, swaged sockets, or spelter sockets. Depending on rope construction and type, their efficiency rating ranges between 75% and 80%. For detailed information ask the manufacturer of your wedge socket.

The installation of Python rope into wedge sockets is similar to that of 6- or 8-strand wire rope. Here's a quick run down of some of the do's and don'ts:


- Always inspect socket, wedge and pin before installation.
- For intermediate rope sizes use next larger socket size (e.g. use a 3/4" socket for a 18 mm rope)
- Align live end of rope with center line of pin.
- Use a hammer to seat Wedge and rope as deep into the socket as possible.
- Apply first load to fully seat the wedge and wire rope in the socket.
- Ensure that the rope end is welded and/or properly seized before inserting the rope into the socket. Failing to do so may cause the core to slip and/or the strands to loosen inflicting serious rope damage.
- The tail length should be a minimum of 6 x rope diameter but NOT less than 6 inches.
- Secure the dead end section of the rope. Several accepted methods are available and illustrated on this page.
- **DO NOT CLAMP OR CLIP THE DEAD END OF THE ROPE TO THE LIVE END.**
- During use, do not strike the dead end section with any other elements of the rigging (called Two-Blocking).
- When using with 34x7 and all Python non-rotating types attach a hose clamp approx. 3-5 ft above the socket to the **LIVE END** of the rope **BEFORE ATTACHING THE SOCKET**. The clamp will prevent any looseness of the outer strands, which may have occurred during installation, from travelling along the entire rope length. If this happens you have to shorten the rope slightly but you will have contained the damaged zone to a very short rope portion.

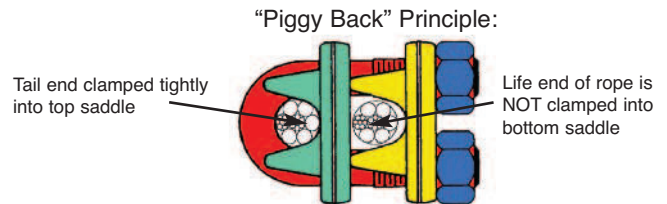

## WRONG Installation

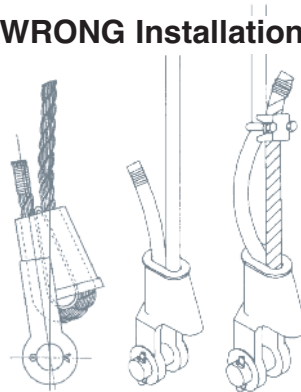


## Crosby "Terminator™" Principle:

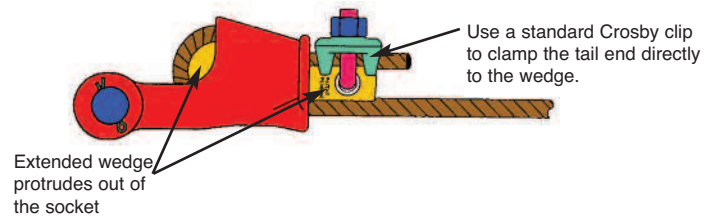


## Non-Rotating Ropes

Attach hose clamp to all rotation-resistant and non-rotating wire rope to prevent any slack of outer- or inner strands from travelling along the entire rope length

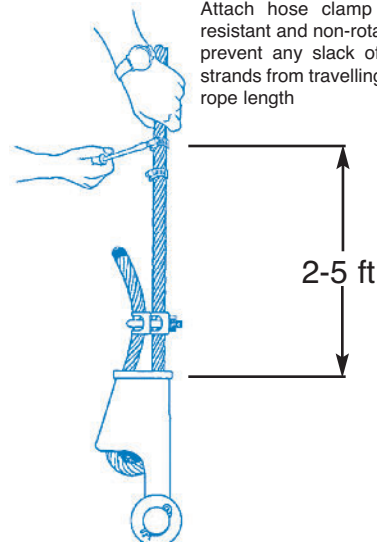

## Accepted Methods

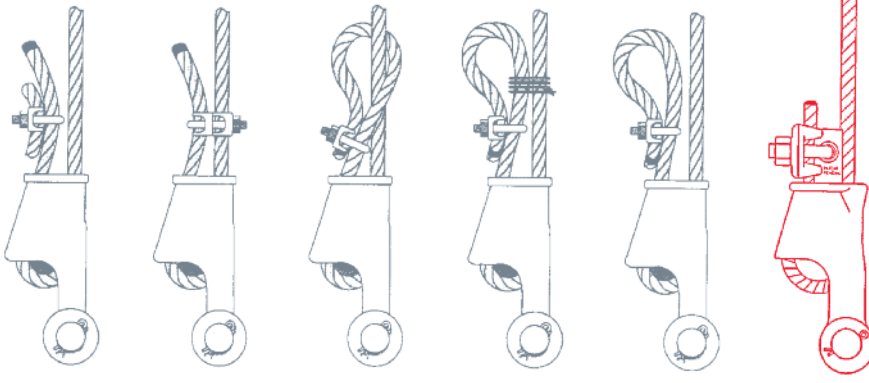

**Never use a wedge made by a different manufacturer than the socket. Use only original spare parts.**



# Installation of Wire Rope

## Using Your rope for the first time

### Break In Period

After installing a new rope it is necessary to run it through its operating cycle several times under light load and at reduced speed. This allows the rope to adjust itself to the working conditions and enable all strands and wires to become seated. Depending on rope type and construction some rope stretch and a slight reduction in rope diameter will occur as the strands and core are compacted. The rope is less liable to be damaged when full load is applied.

The initial stretch (constructional stretch) is a permanent elongation that takes place due to slight lengthening of the rope lay and due to a slight decrease in rope diameter. Constructional stretch generally takes place during the first 10-20 lifts, and increases the rope length by between 1/2% for fiber core rope, approx. 1/4% for 6-strand steel core rope, and approaches zero for compacted Python ropes

If you have the chance and the equipment configuration allows this, disconnect the rope end after the break-in-period to allow any possible torque and twists which may have developed during installation and the break-in-period to be released at the end connection.


### Equipment Testing

In many cases the crane equipment has to be tested prior to use. Proof testing requires to purposely overload the crane to varying degrees. The magnitude of overloading depends on the type and capacity of the crane and which governing authority certifies the equipment. The test may impose an overload of between 10% and 100% of the crane's rated capacity.

Under **NO** circumstances must the crane be tested prior to the break in procedure of the wire rope. If you overload a rope which has not yet been broken in, you may inflict permanent damage to the rope.

Equipment with multiple layer windings call for additional caution. As mentioned before, severe overloads of the top layers may damage the lower ones or may crush the rope. If possible, test the crane with the rope spooled in the first drum layer only.

If the crane is equipped with a smooth drum, special care must be taken to ensure that the rope does not cross-wind over itself when testing the crane. After testing (overloading) you have to repeat the spooling procedure as outlined on page -10- 'Winding on smooth or flat faced drums'.

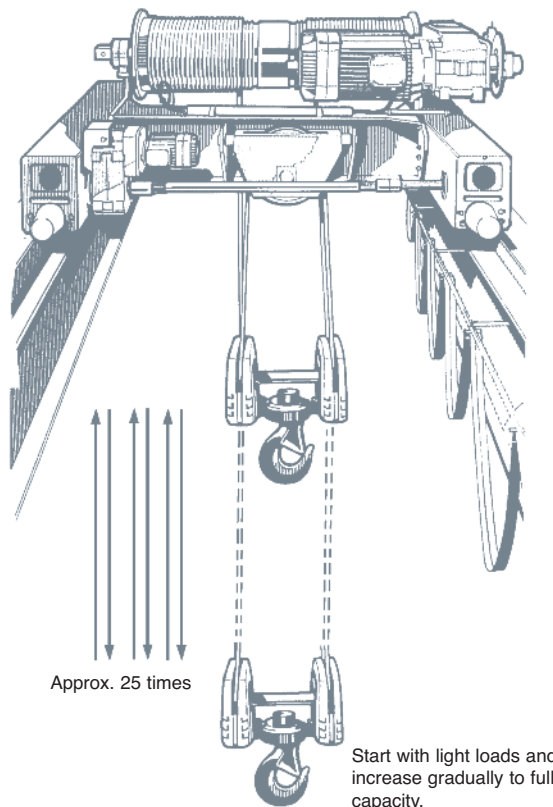











# End Terminations

## Efficiency Ratings

This page lists several types of end terminations used for overhead lifting applications.

All efficiency ratings are based on the difference between the actual breaking strength of a rope and the attained breaking strength with that specific fittings. The only fitting which will attain a 100% efficiency are spelter sockets; provided they are properly attached.

**ALL** other fittings are swaged or clamped onto the rope. The swaging or clamping process compresses the rope to varying degrees causing a slight loss of strength. Some publications refer to '100%' efficiency with swaged sockets. Bear in mind, that most wire ropes have an actual breaking strength up to approximately 5%-15% **HIGHER** than the breaking strength listed in catalogue tables. With other words: a fitting having an efficiency rating of 90% may very well develop 100% of the rope's CATALOGUE breaking strength because the rope's **ACTUAL** breaking may very well be 5%-15% higher.

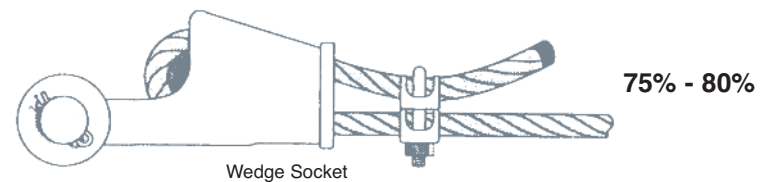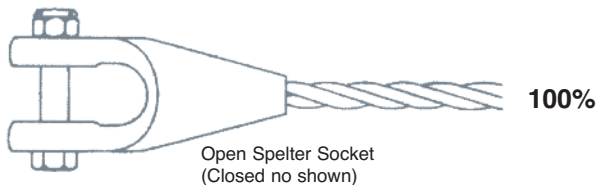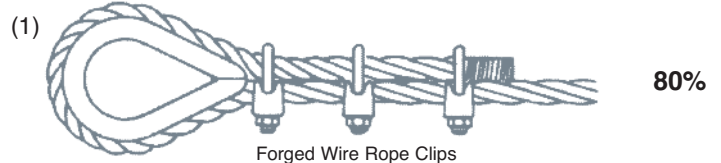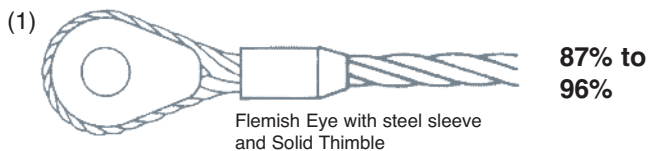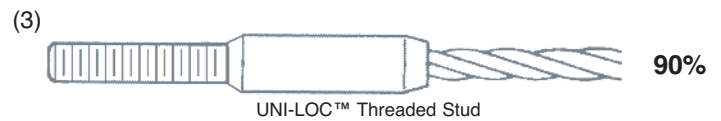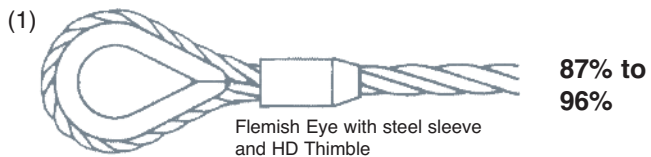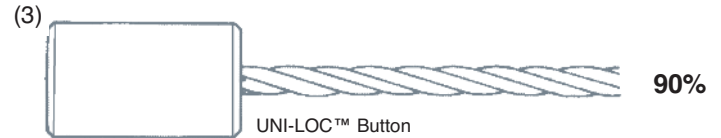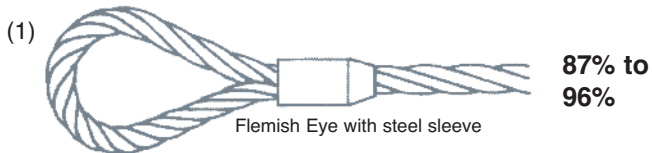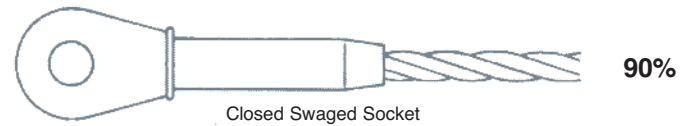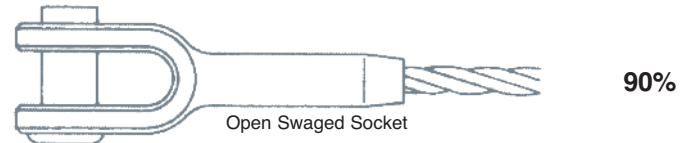

(1) Use only with 6-strand wire rope. Efficiency rating depends on rope size and core type.

(2) Meets EN13411

(3) Fabrication efficiency depends on fitting dimensions. Ask for information on UNI-LOC™ Assemblies.

# Inspection of Wire Rope

## General

It is essential to maintain a well planned program of periodic inspections. In most cases there are statutory and/or regulatory agencies whose requirements must be adhered to. Whether or not such requirements exist in your specific environment, you can be guided by the suggested procedures that follows.

**A**brasion, **B**ending and **C**rushing represent the **ABC's** of wire rope abuse, and it is the primary goal of good inspection practice to discover such conditions with minimum effort. When any degradation indicates a loss of original rope strength, a decision must be made quickly to allow the rope to remain in service. Such a decision can only be made by an experienced inspector. His determination will be based on:

- 1) Details of the equipment's operation
- 2) Frequency of inspection
- 3) Maintenance history
- 4) Consequences of failure
- 5) Historical records of similar equipment



## Broken Wires

### Shortly after installation

The occasional premature failure of a single wire may be found early in the rope life and in most cases it should not constitute a basis for rope removal. Note the area and watch carefully for any further wire breaks. Remove the broken ends by bending the wire backwards and forwards. In this way the wire is more likely to break inside the rope where the ends are left tucked away between the strands. These infrequent premature wire breaks are not caused by fatigue of the wire material.



### During wire rope service (Fatigue Breaks)

The rope must be replaced if a certain number of broken wires are found which indicate that the rope has reached its finite fatigue life span. See pages tables next page.

## Areas to examine

(Based on ISO 4309)

1) Examine termination of the rope.


2) Examine for defective coiling, which causes deformation (flattened portions) and wear, which can be severe at cross-over positions. (cross-overs only if multiple layer drums)

3) Examine for wire breaks.

4) Examine for corrosion.

5) Look for deformations caused by snatch loading.

6) Examine portion which winds over sheave for wire breaks and wear.

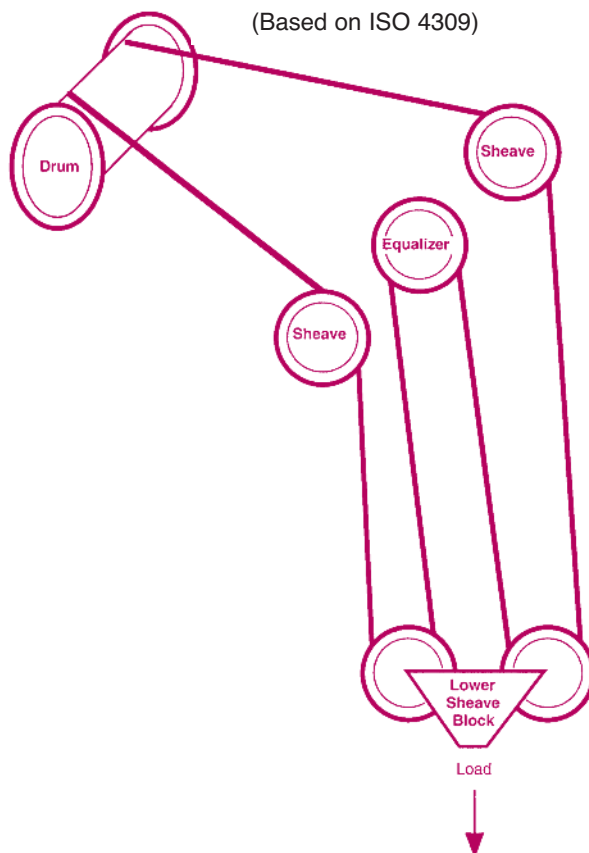

7) Check section of rope on equalizer sheave (or compensating pulley) by lifting up the rope to look at the underside.

8) Look for deformation.

9) Check rope diameter against original wire rope diameter. Keep record of rope diameter measured after break in period. Note that shortly after installation rope diameter will slightly decrease.

10) Examine carefully length which runs through lower sheave block, particularly that section which is in contact with the pulley when the crane is in a loaded condition.



11) Examine for wire breaks or surface wear.




# Inspection of Wire Rope

Under normal operating conditions single wires will break due to material fatigue on the **CROWN** of a strand.  
**ALL wire rope removal/retirement criteria are based on FATIGUE wire breaks located at the CROWN of a strand.**  
 Tables see next page.

## CROWN Fatigue Wire Breaks

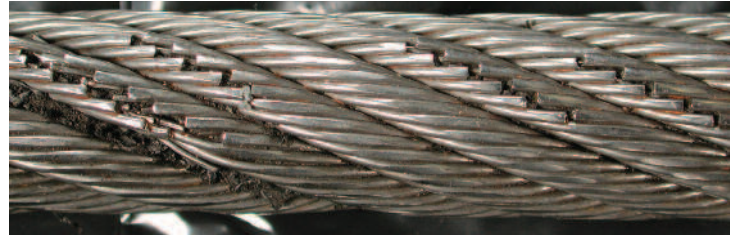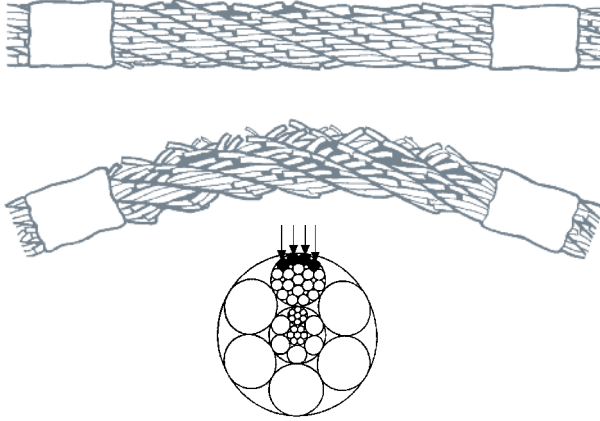

Example: Severe crown wire breaks on a 10-strand overhead crane wire rope. Crown breaks originate at the **OUTSIDE** of the rope at the contact point between rope and sheave/drum.

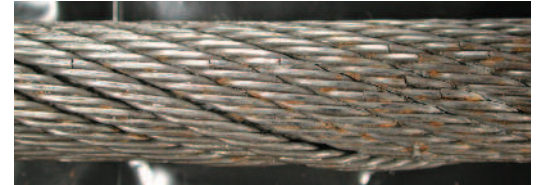


Crown wire breaks on a Python® Lift non-rotating wire rope



**Remove wire rope from service if even if you detect a SINGLE valley wire break ONLY.**  
**Valley breaks hide internal wire failures at the core or at the contact between strand and core.**

## VALLEY Wire Breaks

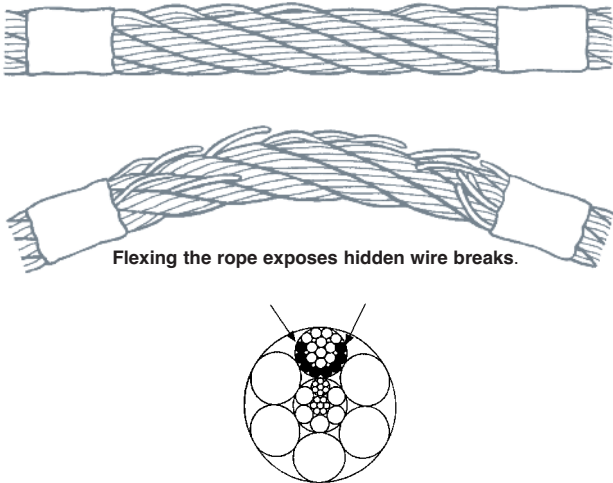

Flexing the rope exposes hidden wire breaks.



Example: Valley wire breaks on a 8-strand overhead crane wire rope


Valley breaks originate **INSIDE** the rope. Condition of the inner strands of the same rope as above. The core has completely failed and imminent catastrophic rope failure will be the result.



A single valley wire break on a 19x7 rotation resistant rope.



Condition of core under that same single valley break. Note the extreme notching of individual wire and the countless wire breaks. Such a condition is hidden under just a single (1) valley break !

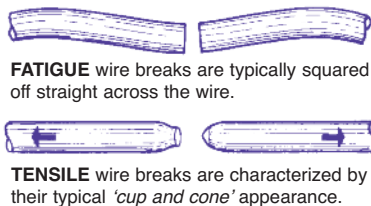

**FATIGUE** wire breaks are typically squared off straight across the wire.

**TENSILE** wire breaks are characterized by their typical 'cup and cone' appearance.



On the right and left a typical cut -and-cone break pattern. The wires in the center of the photo are a combination of fatigue and shear break.

**NOTE: For a more indepth discussion on wire rope discard and inspection we suggest to attend our "Wire Rope" and "SlingMax® Rigger's Mortis Seminar". Call 1.800.457.9997 for details and dates.**




## Inspection of Wire Rope



### Damages caused by connection a right hand to a left hand lay rope



These 3 picture show what happens when you connect a left-lay rope to a right-lay rope, as done with this boom pendant extension. Both ropes are opening up to the point where the strands are nearly parallel to each other; they completely untwisted themselves and developed excessive wire breaks.

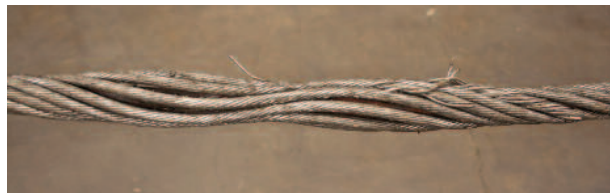

### Damages caused by multiple layer winding

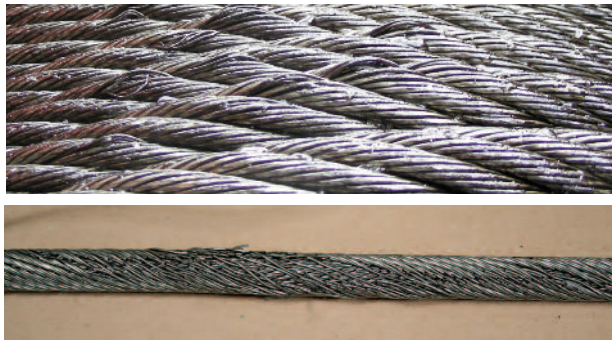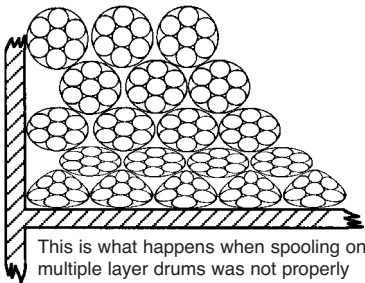

The result of such non-tensioning of the layers are looping of individual wires, completely crushed strands, total deterioration of a non-rotating rope due to gross neglect of inspection procedure.



All removal criteria are based on the use of steel sheave.

Standard	Version	Equipment	Running Ropes*		Rotation Resistant*		Standing Ropes*	
			Number of allowable broken wires in	Number of allowable broken wires in	Number of allowable broken wires in	Number of allowable broken wires in	Number of allowable broken wires	Number of allowable broken wires
			one rope lay	one strand in one lay	6 x rope dia.	30 x rope dia.	in one lay	at end connection
ASME B30.2	2011	Overhead and Gantry Cranes	12	4	-	-	-	-
ASME B30.3	2012	Tower Cranes	12	4	2	4	-	-
ASME B30.4	2010	Portal and Pedestal Cranes	6	3	4	See below 2	-	2
ASME B30.5	2011	Mobile and Locomotive Cranes	6	3	2	4	-	2
ASME B30.6	2010	Derricks	6	3	Consult rope manufacturer		3	2
ASME B30.7	2011	Winches	6	3	6	4	3	2
ASME B30.8	2010	Floating Cranes and Derricks	6	3	-	4	3	2
ASME B30.16	2007	Overhead Hoists (Underhung)	12	4	2	4	-	-
ASME B30.29	2012	Self Erecting Tower Cranes	6	3	2	4	3	2

\*) Also remove if you detect one (1) wire broken at the contact point with the core or adjacent strand; so called 'valley' breaks.

4 in one lay 2 in one strand in one lay

## Regular single-layer and parallel type (e.g. DoPar®) Wire Rope

**Reference: ISO 4309:2010**
**Number of wire breaks, reached or exceeded, of visible broken wires**

Number of load bearing wires in outer strands <sup>a</sup>	Examples of rope constructions and types	Number of visible broken wires <sup>b</sup>					
		Sections of rope working in steel sheaves and/or spooling on a single layer drum (wire breaks randomly distributed)				Sections of rope spooling on a multiple-layer drum <sup>c</sup>	
		Classes M1 to M4 or class unknown <sup>d</sup>				All Classes	
		Regular Lay		Langs Lay		Regular and Langs Lay	
		Over a length of 6xd <sup>e</sup>	Over a length of 30xd <sup>e</sup>	Over a length of 6xd <sup>e</sup>	Over a length of 30xd <sup>e</sup>	Over a length of 6xd <sup>e</sup>	Over a length of 30xd <sup>e</sup>
under 50	6x7, 7x7	2	4	1	2	4	8
51 to 75	6x19 Seale*	3	6	2	3	6	12
76 to 100		4	8	2	4	8	16
101 to 120	6x26, 6x25, 8x19 Seale	5	10	2	5	10	19
121 to 140		6	11	3	6	11	22
141 to 160	8x19 Filler, Python® Super 8	6	13	3	6	13	26
161 to 180	6x36*, Python® Power 9	7	14	4	7	14	29
181 to 200	Python® Multi, Ultra	8	16	4	8	16	32
201 to 220	6x41*	9	18	4	9	18	38
221 to 240		10	19	5	10	19	38
241 to 260	8x36*	10	21	5	10	21	42
261 to 280		11	22	6	11	22	45
281 to 300		12	24	6	12	24	48
300 and over		0.04n	0.08n	0.02n	0.04n	0.08n	0.16n

Ropes having outer strands of Seale construction where the number of wires in each strand is 19 or less (e.g. 6x19 Seale) are placed in this table two rows **above** that row in which the construction would normally be placed based on the number of load bearing wires in the outer layer of strands.

<sup>a</sup> Filler wires are not regarded as load-bearing wires and are not included in the number of total wires in the outer strands.

<sup>b</sup> A broken wire has two ends (counted as one wire break)

<sup>c</sup> The discard criteria for ropes spooling on to multiple layer drums applies to deterioration that occurs at the cross-over zones and interference between wraps due to fleet angle effects and NOT to sections of rope which only work in sheaves and do NOT spool onto the drum.

<sup>d</sup> Twice the number of broken wires listed may be applied to ropes on mechanisms whose ISO classification is known to be M5 to M8

<sup>e</sup> d = nominal rope diameter

## Rotation-Resistant and Non-Rotating Wire Rope or Category I, and II according to ASTM 1023

Reference: ISO 4309:2010

Number of wire breaks, reached or exceeded, of visible broken wires

Number of load bearing wires in outer strands <sup>a</sup>	Examples of rope constructions and types	Number of visible broken wires <sup>b</sup>			
		Sections of rope working in steel sheaves and/or spooling on a single layer drum (wire breaks randomly distributed)		Sections of rope spooling on a multiple-layer drum <sup>c</sup>	
		All Classes		All Classes	
		Over a length of 6xd <sup>d</sup>	Over a length of 30xd <sup>d</sup>	Over a length of 6xd <sup>d</sup>	Over a length of 30xd <sup>d</sup>
4 strands ≤ 100	4x29F	2	4	2	4
3 or 4 strands ≥ 100	4x26 WS, K3x40	2	4	4	8
At least 11 outer strands					
71 to 100	19x7	2	4	4	8
101 to 120	35x7	3	5	5	10
121 to 140	39x7	3	5	6	11
141 to 160		3	6	6	13
161 to 180		4	7	7	14
181 to 200	19x19S	4	8	8	16
201 to 220		4	9	9	18
221 to 240	35x17S	5	10	10	19
241 to 260		5	10	10	21
261 to 280		6	11	11	22
281 to 300		6	12	12	24
300 and over	35x31WS, 35x25F, 35x19W	6	12	12	24

Ropes having outer strands of Seale construction where the number of wires in each strand is 19 or less (e.g. 6x19 Seale) are placed in this table two rows **above** that row in which the construction would normally be placed based on the number of load bearing wires in the outer layer of strands.

<sup>a</sup> Filler wires are not regarded as load-bearing wires and are not included in the number of total wires in the outer strands.

<sup>b</sup> A broken wire has two ends (counted as one wire break)

<sup>c</sup> The discard criteria for ropes spooling on to multiple layer drums applies to deterioration that occurs at the cross-over zones and interference between wraps due to fleet angle effects and NOT to sections of rope which only work in sheaves and do NOT spool onto the drum.

<sup>d</sup> d = nominal rope diameter

# Inspection of Wire Rope

## Worn and abraided wires


Wear, due to friction on sheaves, rollers, drums, etc., eventually causes outer wire abrasion.

Before any inspection is made, determine what type of wire rope you have in service. Many of today's wire ropes are 'compacted', 'calibrated', or 'die formed'. This manufacturing process purposely flattens the outer wires and for an inexperienced inspector these ropes may appear to be already abraded when indeed they are brand new. If you are in doubt about what type of rope you are about to inspect, have a look at a section of the rope which was not subjected to any abrasive work; e.g. like the safety wraps on the drum or a section just behind the end connection.

The round outer wires of standard wire rope will become flat on the outside due to friction when in contact with drums, sheaves, or other abrasive matter like sand or gravel. This is part of normal service deterioration and in most crane installations relatively even abrasion will occur. **The rope must be replaced, however, if this wear exceeds 1/3 of the diameter of the wire.**

**It is good practice to compare a section of the rope which was NOT subjected to any bending work (e.g. the safety wraps, or a short section behind the end fitting) to the rope section to be inspected.**

The same applies when evaluating any possible reduced rope diameter during service. (See next column)

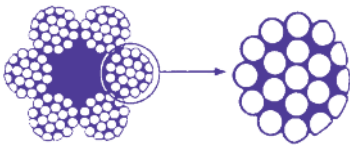

When the surface wires are worn by 1/3 or more of their diameter the rope must be replaced.



Abrasion caused by dragging the rope over a sharp object (steel corner, sharp plate, abrasive surface etc.)



Peening and subsequent wire break caused by high fleet angle and rope vibration.



Rope abrasion caused by normal operating condition on a high cycle crane. Rope must be retired.

## Reduction in wire rope diameter


As already discussed on page -5- 'Measuring the rope diameter' and on page -12- 'Break-In-Period' shortly after installation the wire rope diameter will slightly decrease. This is normal and is caused by the adjustment of all rope elements when loaded the first time. To evaluate the diameter reduction, you have to measure the rope when new, and you also have to measure the rope after the break in period at a specified load. This gives you a good indication of the magnitude of the initial diameter reduction in your specific application. The diameter reading you took after the break in period should now become your 'gauge'. Do not compare the rope diameter you are about to take with the 'catalogue' diameter. It may give you a false indication, since wire rope may have a plus tolerance of up to 4% to 5% over the 'catalogue' diameter.

If you detect a further diameter reduction when measuring the rope under the same load condition as after the break in period, it is often due to excessive abrasion of the outside wires, loss of core support, internal or external corrosion, inner wire failures, and/or inner wire abrasion. However, there will always be a normal continuous small decrease in diameter throughout the rope's service life.

**Core deterioration, when it occurs, is revealed by a more rapid reduction in diameter, and when observed, it is time for removal.**

Deciding whether or not a rope is safe is not always a simple matter. A number of different but interrelated conditions must be evaluated. It would be dangerously unwise for an inspector to declare a rope 'safe' for continued service simply because its diameter had not reached a certain minimum diameter if, at the same time, other observations led to a different conclusion.

However, ASME, ISO 4309, CSA, other Canadian Provincial H&SA and USA OSHA Regulation have various values published for maximum allowable diameter reductions. They are somewhat confusing as they show diameter reduction values from 3.5% to 9%, and some give reduction values in inch fractions depending on rope nominal diameter.

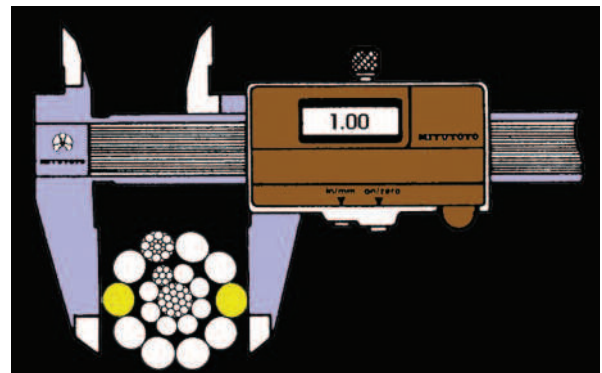

Take measurement of rope diameter AFTER the Break In Period.



# Inspection of Wire Rope

## Rope Stretch

### Constructional Stretch


All ropes will stretch to varying degrees when loads are initially applied. This stretch is known as the 'constructional stretch' (see also: page -12- Run-In Period)

This stretch occurs in three phases:

1) Initial or constructional stretch during the early period (Run-In) of rope service, caused by the rope adjusting to the operating conditions.

2) Following the run-in period there is an extended period -the longest part of the rope's service life- during which a slight increase in stretch takes place over an extended time. This results from normal wear, fatigue etc. On a graph this portion would almost be a horizontal straight line inclined slightly upward from its initial level.


3) Thereafter, the stretch occurs at a quicker rate. This means that the rope has reached the point of rapid degradation; a result of prolonged subjection to abrasive wear, fatigue, and inner undetected wire breaks, etc. This second upturn of the curve is a warning indicating that the rope should be removed to avoid sudden catastrophic rope failures.

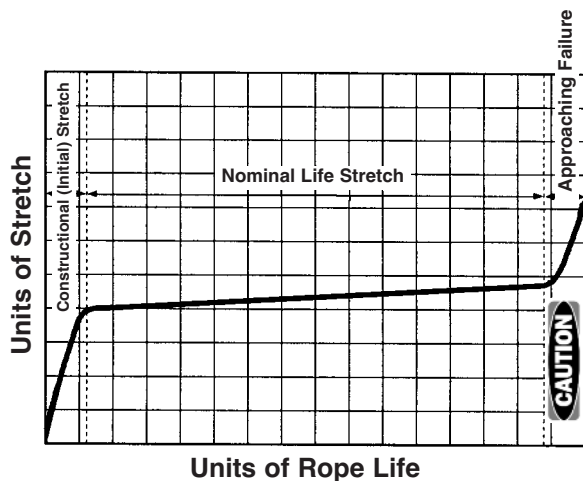

## Core Wire Breaks

The most difficult to detect wire rope deterioration. Core wire breaks are more likely to appear in 6 & 8-strand and 19x7/19x19 ropes, rather than in multi-strand plastic coated core wire rope. We have had examples where 8x36 and 19x7 ropes broke showing no externally visible removal criteria, yet the core was completely broken to pieces. Once the core breaks, the resultant sudden shock load on the outer strands may cause the rope to fail in a catastrophic, unpredictable manner.

Core wire breaks in PYTHON™ plastic coated core ropes are not likely to appear due to the cushioning effect of the plastic layer. Field experience from customer returned plastic coated core

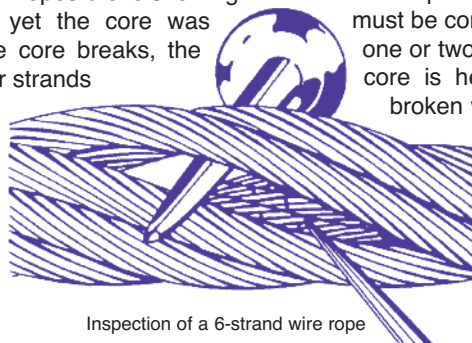

Inspection of a 6-strand wire rope


### Elastic Stretch / Elastic Limit

Elastic stretch of wire rope occurs as soon as a load is applied. When the load is released the rope returns to its initial length, hence the term 'elastic' stretch. This stretch is caused by the elastic deformation of the steel itself (the individual steel wires) and also by the lay of the rope which could be compared to resemble a coil spring. With other words, the longer the lay length of a rope becomes, the less elastic stretch it will develop. Elastic stretch in a wire rope is a desired feature. The ability of a rope to stretch under load means that the rope is capable to absorb energy; the term here is 'energy absorption capability'.

In many instances it is not easy to clearly distinguish between (the remains of) constructional stretch and elastic stretch as they may occur together especially when the rope is new.

The values for Elastic Stretch are dependent on rope construction, lay length and type, steel material, tensile strength of wires etc. An approximation is 0.25% to 0.6% at WLL (or lifting capacity). The E-module varies similarly from about 11 Million to 16 Million lbs/inch². For exact values please contact us for further information.

Elastic stretch turns into a 'permanent' stretch when the rope is loaded beyond 55%-60% of its breaking strength (or beyond 2-1/2 to 3 times its WLL). At that point the steel material elongates and deforms permanently and renders the rope inoperable as the individual wires will have lost much of their mechanical properties to withstand material fatigue.

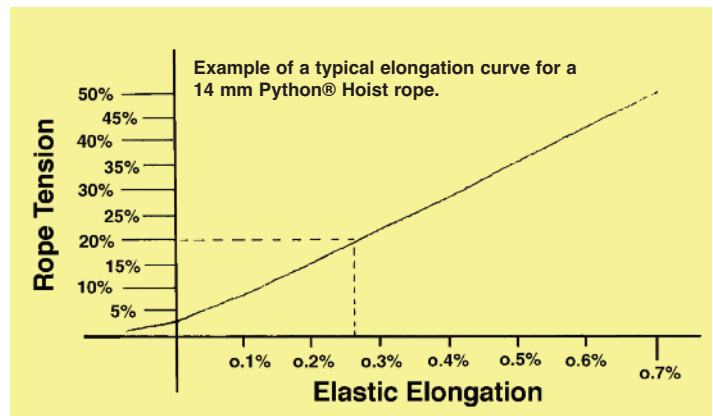

PYTHON rope revealed no broken core wires without the outer strands having visible wire breaks in excessive numbers far beyond any removal criteria.

To inspect the core of a 6- or 8-strand wire rope, the rope must be completely unloaded. Carefully insert a spike through one or two strands and turn the spike with the rope lay. If the core is heavily lubricated you need good lighting to see broken wires! You may also wish to use an air gun to blow excessive lubricant off the core, but be sure to re-lube the core after your inspection.

As with any rotation resistant or non-rotating rope we recommend to leave such internal inspections to the expert as such inspections can permanently damage the rope.

# Inspection of Wire Rope

## Mechanical Damages

It is nearly impossible to list all variations of mechanical damage a rope might be subjected to. Therefore, the following list should only be taken as a guideline. None of these damages are repairable. However, the magnitude of the damages may vary from a slight cosmetic damage to total destruction of the wire rope. If you are not sure about the extent of the damage, change the rope, or call us for technical assistance and advice.



Bird Cage (6-strand rope) caused by shock loading.



Bird Cage (non-rotating rope) caused by worn sheave grooves.



Bird Cage forced through a tight sheave.



Protruding Core because of shock loading, torque build-up during installation, tight sheaves, or incorrect rope design.



Actual example of a wire rope which jumped out of the sheave. Note the imprint of the sheave flange.



Wire rope rolled off a sheave



Multiple drum winding: Layer-to-Layer Crushing




Smooth drum winding: Rubbing between drumwraps



Smooth drum winding: Crushing at Crossover Points

## Fittings

Inspect the fittings on your rope and look for wire breaks at the shank of sockets or sleeves. Inspect the fittings for wear, distortion, cracks, and corrosion. Follow the inspection criteria of the fitting manufacturer and **DO NOT ATTEMPT TO REPAIR ANY WIRE ROPE FITTING YOURSELF !** Watch for missing hook latches and install new ones if necessary. If latches wear out too rapidly, ask us for special Heavy Duty latches which may fit your hook. Some hook manufacturers offer self-locking and special Gate Latch hooks.

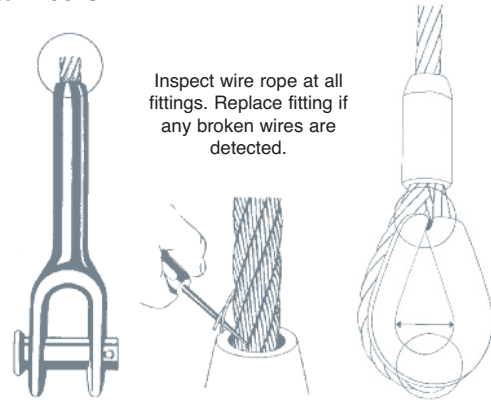


Actual example of a rotation resistant wire rope which was forced to run in too tight sheave grooves. Result is so called 'core popping'.

## Kinks

Kinked wire rope due to improper installation procedure.



Kinked wire ropes which have been used. Kinks are pulled tight and caused distortion and failure.

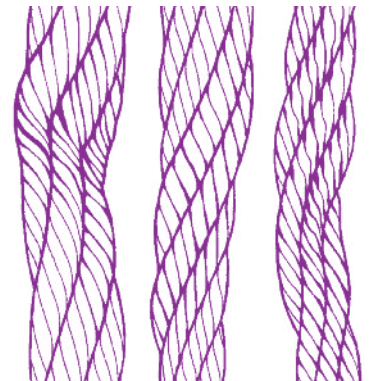

# Inspection of Wire Rope

## Corrosion

Corrosion, while difficult to evaluate, is a more serious cause of degradation than abrasion. Usually, it signifies a lack of lubrication. Corrosion will often occur internally before there is any visible external evidence on the rope surface.

This is one of the reasons why we developed PYTHON™ wire rope with a plastic protected core. The plastic protects the core against corrosion and the user does not have to worry about undetected corrosion which may lead to a sudden and unexpected rope failure.

Corrosion of the rope core not only attack the metal wires, but also prevents the rope's component parts from moving smoothly as it flexes.

Severe rusting leads to premature fatigue failure of single wires. When the rope shows more than one wire failure near a fitting, it should be removed immediately. To prevent abnormal corrosion, the rope should be kept well lubricated. In situations where abnormal corrosive action can occur, it may be necessary to use galvanized or stainless steel wire rope.

## Rope Removal and Possible Cause

Fault		Possible Cause	
Accelerated Wear	Severe abrasion from being dragged over the ground or obstructions. Rope not suitable for application. Poorly aligned sheaves. Large fleet angle. Worn sheave with improper groove, size or shape. Sheaves and rollers have rough wear surface. Stiff or seized sheave bearings. High bearing and contact pressures. Sheaves/drum too small	Stretch	Overload. Passed normal stretch and approaches failure.
		Broken Wires Near Fitting	Rope Vibration. Fittings get pulled too close to sheave or drum.
		Sheaves/Drums Wear Out	Material too soft.
		Pinching, Crushing Oval Shape	Sheaves grooves too small. Not following proper installation and maintenance procedure on multiple layer drums.
Rapid Appearance of Broken Wires	Rope not suitable for application Reverse bends. Sheaves/drums too small. Overload and shock loads. Excessive rope vibration. Kinks that have formed and have been straightened out. Crushing and flattening of the rope. Sheave wobble.	Rope Unlays (Opens up)	Wrong rope construction. Rope end attached to swivel.
		Reduction in Diameter	Broken core. Overload. Internal wear. Corrosion.
		Bird Cage	Tight sheaves. Rope is forced to rotate around its own axis. Shock loads. Improper Wedge Socket installation.
Corrosion	Inadequate lubrication. Improper storage. Exposure to acids or alkalis.	Core Protrusion	Shock loading. Disturbed rope lay. Rope unlays. Load spins and rotates rope around its own axis.
Kinks	Improper installation. Improper handling. Slack rope pulled tight.		
Excessive Localized Wear	Drumcrushing. Equalizer Sheave. Vibration.		



# Inspection of Sheaves and Drums

## Inspection

Proper maintenance of the equipment on which the ropes operate has an important bearing on rope life. Worn grooves, poor alignment of sheaves and worn parts resulting in shock loads and excessive vibration will have a deteriorating effect.

Sheaves should be checked periodically for wear in the grooves which may cause pinching, abrasion, and bird-caging of the rope. If the groove shows signs of rope imprints the sheave must be replaced or re-machined and re-hardened. The same should be done on drums showing similar effect.

Poor alignment of sheaves will result in rope wear and wear on the sheave flange. This should be corrected immediately.

Excessive wear in the sheave bearings can cause rope fatigue from vibration.

Large fleet angles will cause severe abrasion of the rope as it winds onto the drum. Furthermore, the rope will roll into the sheave groove introducing torque and twist which may cause high stranding and bird-cages.

## Dimension of the Groove Radius



The very first item to be checked when examining sheaves and drums, is the condition of the grooves. To check size, contour and amount of wear, a groove gauge is used.

Two types of groove gauges are in general use and it is important to note which of these is being used. The two differ in their percentage over the Nominal Rope Diameter.



For new or remachined grooves, and for inspection of fitness for new ropes, the groove gauge should be 1% over the maximum allowable Plus Tolerance of the new rope; alternately, the sheave groove must measure 1% over the Actual Rope Diameter intended to be installed.

Many groove gauges on the market are so called 'No-Go' gauges and are made with Nominal plus 1/2 of permissible rope Plus Tolerance. If you use these gauges be sure that the existing rope is **SMALLER** than this gauge. A rope operating in an even slightly undersized groove, deteriorates faster and may develop bird-cages.


(see page -22- for details on groove dimensions)

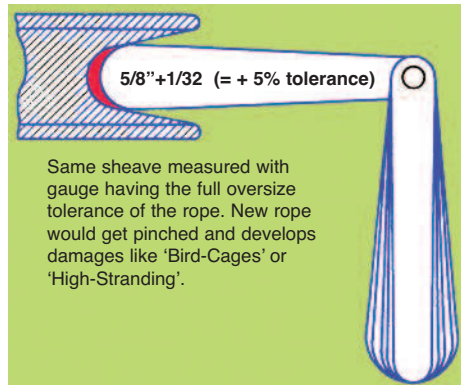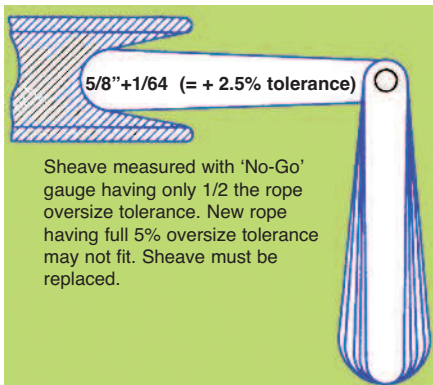


Correctly + 5% sized plastic and stainless steel sheave gauges available from Unirote.

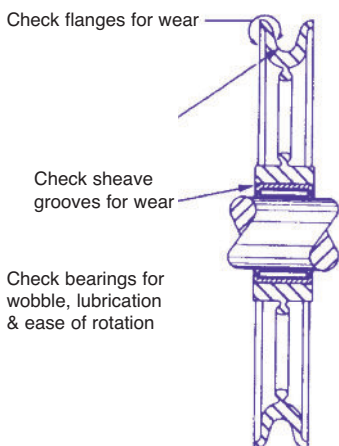


Properly matched rope & sheave groove




Sheave groove too small



Sheave groove is undercut



New rope will get damaged beyond repair.



A sheave corrugated by the rope's 'print'. This sheave will damage the rope.




# Inspection of Wire Rope

## Cut and Slip Procedure


On multiple layer drums, wire rope will wear out at the crossover points from one wrap to the next. At these crossover points, the rope is subjected to severe abrasion and crushing as it is pushed over the rope 'grooves' and rides across the crown of the layer beneath. The scrubbing of the rope, as this is happening, can easily be heard.

In order to extend the rope's working life, shortening of the rope at the drum anchoring point of approx. 1/3 of the drum circumference, moves the crossover point to a different section of the rope. Now, a rope section previously not subjected to scrubbing and crushing will take the workload.

(See page -23- DRUMS)

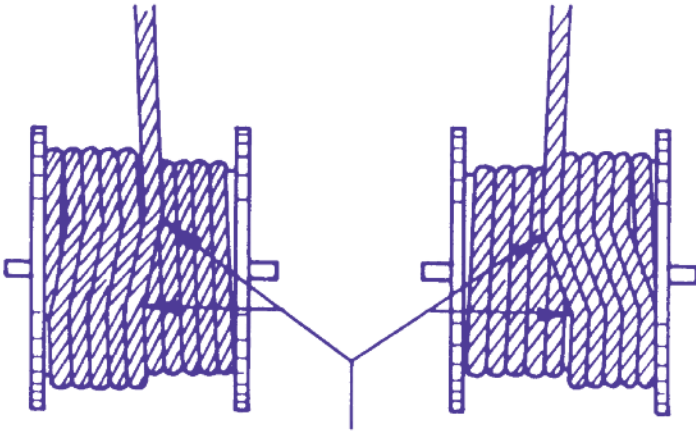

These are the cross-over points at which damage to a rope may occur first.

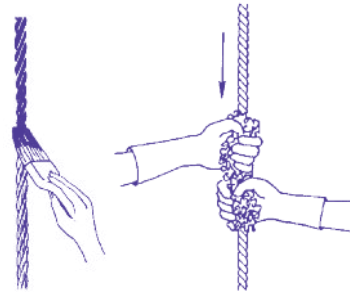

## Lubrication

During fabrication, ropes are lubricated; the kind and amount depending on the rope's size, type and use, if known. This in-process treatment will provide the finished rope with ample protection for a reasonable time if it is stored under proper conditions, and in the early stages of the rope's working life. It must be supplemented, however, at regular intervals.

Re-lubrication of a wire rope is not always a simple task. Apart from lubricant being a messy matter in itself, old lubricant, dirt and other particles may cover the outside of a rope to a point where any newly applied lubricant will not be allowed to penetrate the inside of a rope. In these cases it becomes necessary to either thoroughly clean the rope, or to use a high pressure lubrication device which forces new lubricant into the rope.

If the wire rope surface is clean, re-lubrication can also be made with spray cans of specially formulated lubricant which penetrates the inside of a rope.

The re-lubrication procedure and program is very much dependent on the length and size of a rope and on the equipment the rope is installed on. In any case, if a planned program of regular lubrication is not carried out, the rope will deteriorate more rapidly.

Remember that tests have shown that non-lubricated ropes will generate only about 1/3 of the bending cycles than ropes which are well lubricated. Python® ropes with a plastic coated core have the advantage that the inner rope is 'permanently lubricated'; the lubrication is 'sealed in'.



Original PYTHON® wire rope NYROSTEN lubrication is available in spray cans and 5 gal. pails. It has excellent penetration properties to lubricate the rope inside and out to maintain optimum rope fatigue properties.

# Some Rope Data

## Sheaves

We recommend only sheaves made of steel or cast steel. The following are recommended values:

### Groove radius (r):

Minimum 0.53 to 0.535 x d

Maximum 0.55 x d

Recommended:  $\approx 1\%$  over the **actual** wire rope diameter.

### Groove depth (h):

Recommended:  $\approx 1.5 \times d$  or  $d \times \sqrt{2}$

### Sheave throat angle:

For normal applications use  $35^\circ$  to  $45^\circ$  opening. Applications with deflection angles of more than  $1.5^\circ$  use  $60^\circ$  opening. Opening angles below  $35^\circ$  must be avoided.


### Sheave hardness:

As the hardness of the single wires in a rope can be approximated to be 50-55 RC, the hardness on the sheave surface must be min. 35 RC, better is 40-45 RC.

### D/d ratios:

Depending on the actual equipment and usage of wire rope in hoisting- or pulling applications the following D/d ratios are suggested:

CONSTRUCTION	Suggested Minimum D/d ratio
6 x 19 S IWRC	34
6 x 26 WS IWRC	30
6 x 25 FW IWRC	26
6 x 36 WS IWRC	23
Python® Multi	20
Python® Super 8	20
Python® Power 9	26
Python® Ultra	26
8 x 36	18
19 x 7 / 18 x 7	34
19 x 19	20
Python® Compac 18	20
Python® Lift	20
Python® Hoist	20
Python® Compac 35	20

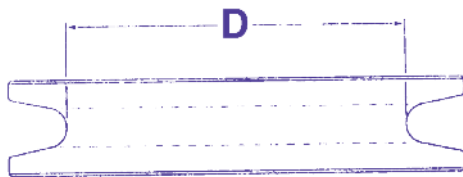

## Drums

Generally, we recommend grooved drums only. The rope is spooled properly and positively. Depending on the drum/rope diameter relationship helix-grooved drums can be used for up to 3 layers without excessive rope wear. For applications with more than 3 layers (e.g. Mobile cranes) we recommend 'Lebus' grooving.

It has to be remembered, however, that rope service life on multiple layer drum systems will always only be a fraction of that compared with single layer helix-grooved drums.

Important: For standard applications the drum grooving should be left hand to accommodate standard right hand lay ropes!

### Groove radius (r):

Minimum 0.53 to 0.535 x d

Maximum 0.55 x d

### Pitch diameter (p):

The pitch dia. has to be chosen in accordance with the groove radius. Under no circumstance should the pitch dia. be smaller than:



Minimum 2.065 x groove radius

Maximum 2.18 x groove radius



If these values are applied to **single layer grooved drums** the maximum permissible rope-deflection angle for regular wire rope constructions is  $4^\circ$ . For non rotating /rotation-resistant ropes, and for Python Ultra and HS-9 the maximum permissible deflection angle is  $1.5^\circ$  only.

### Groove depth (h):

Minimum  $\geq 0.374 \times d$  for helically grooved drums.

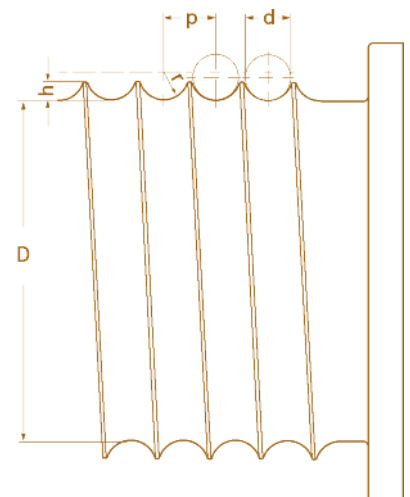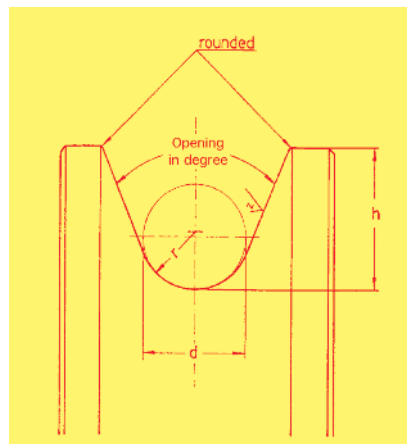

## Some Rope Data

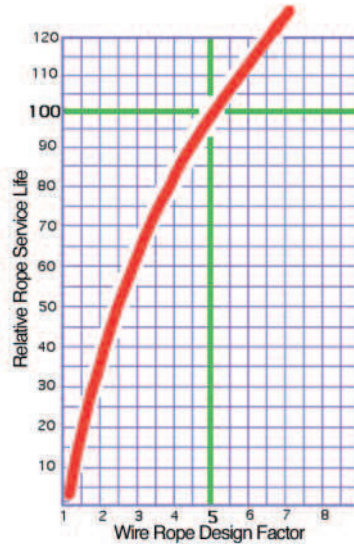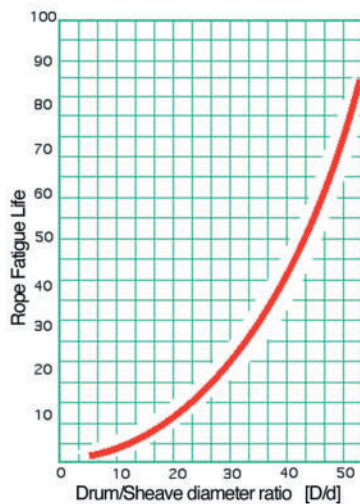


### Relative Service Life

The ability of wire rope to withstand repeated bending work over sheaves and onto drums is also called the 'fatigue resistance'. This term does NOT describe the ability to withstand mechanical damages nor the crush resistance of the rope.


The fatigue resistance of a rope is not time but cycle dependent. Bending fatigue is the ability to withstand repeated bending over sheaves and drums and such ability is depending on factors such as drum diameter, groove dimensions, rope tension, line speed, rope construction, fluctuation between highest and lowest loads etc.

The tables show relative expected rope service life in relationship to  $D/d$  ratios and Design Factors.

For further information on this topic, please contact us for technical assistance and advice.

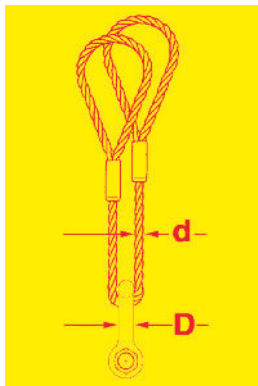


If the shackle or object has 2 times the diameter of a 6-strand wire rope sling ( $D/d$  2:1) the basket sling capacity must be reduced by 40%

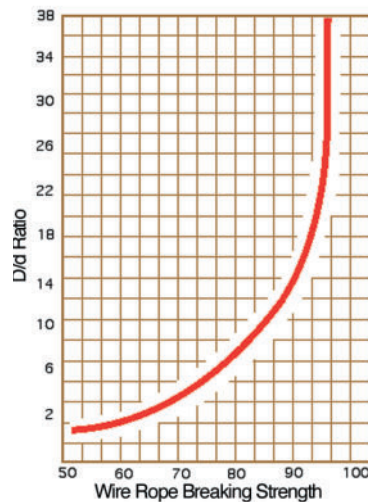

### Loss of Strength over Sheaves or Pins

Rope breaking strength is determined in a standard test wherein fittings are attached to the ends of the rope and the rope is pulled in a straight line. If however, the rope passes over a curved surface (such as a sheave or pin) its strength is decreased. The amount of such reduction will depend on the severity of the bend as expressed by the  $D/d$  ratio. For example, a rope bent around a pin of its own diameter will have only 50% of the strength attributed to it in the standard test. This is called '50% efficiency'. Even at  $D/d$  ratios of 40, there may be a loss of up to 5%. At smaller  $D/d$  ratios, the loss in strength increases quite rapidly. The angle of bend needs not to be  $180^\circ$ ,  $90^\circ$ , or even  $45^\circ$ ; relatively small bends can cause considerable loss.

The table shown derived from standard test data as published by the 'Wire Rope Technical Board', is based on static loads only, and is a weighted average of 458 tests over pins and thimbles on 6x19 and 6x37 class ropes.

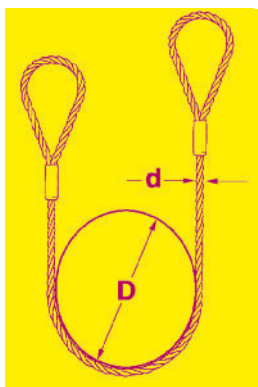


If the object lifted with a 6-strand wire rope sling in a basket hitch is at least 25 x larger than the sling diameter ( $D/d$  25:1) the basket hitch capacity need not to be adjusted.

### Why multi-strand Wire Rope ?


The number of outer strands determine the contact area between the rope and the sheave groove. If this area is increased the points of contact are multiplied and contact pressures are reduced. At the same time lateral notching stresses between strands and wires are reduced, resulting in increased fatigue life.

Extensive tests programs at the University of Stuttgart, Germany, have proven conclusively that the bending fatigue life of wire rope improves with an increasing number of outer strands.



Based on that research we have developed Python® High Performance Wire Rope with 8-, 9-, and 10 outer strands.

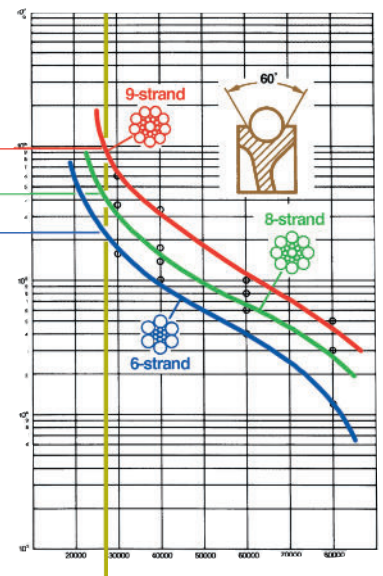





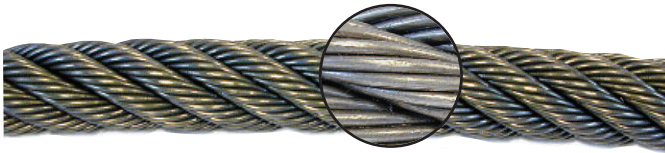


6-strand constructions, class 6x19 or 6x37 with fiber or steel core (IWRC) for general purpose crane and construction use.

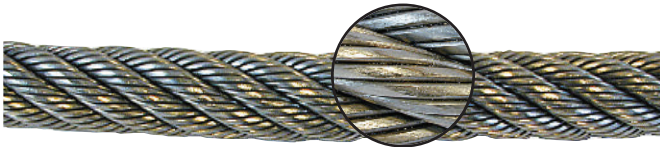




**6-strand Compac®** die-drawn wire rope to increase abrasion and crush resistance. Standard boom hoist rope for lattice cranes.

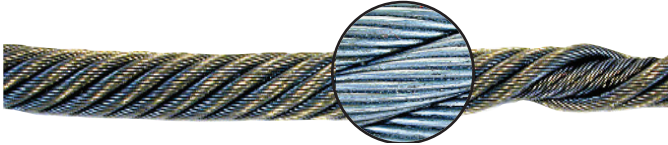



8-strand standard overhead crane rope for improved flexibility. Some sizes Available in DoPar construction.

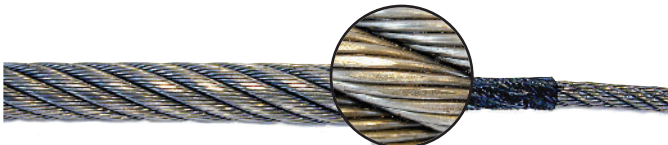


**Python® Super 8** with plastic coated core to eliminate undetected core failures. Standard High Fatigue Resistant rope. Available in left and right lay

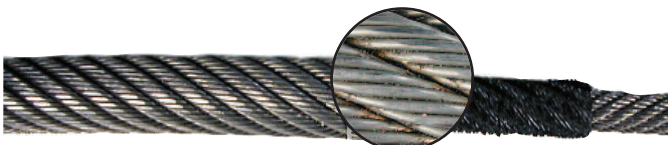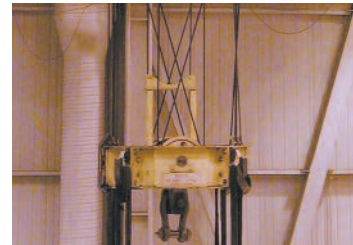



**Python® Multi**, spin resistant to avoid block twisting on overhead cranes. Plastic coated core to prevent core failures. Ultimate life time- and fatigue resistant properties.

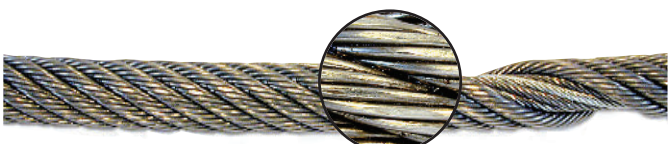



**Python® Power 9**, 9-strand DoPar construction to avoid strand nicking. Extra high strength fatigue resistant type for overhead cranes.

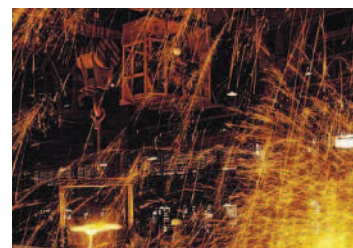






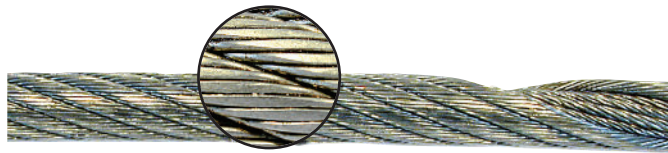



**Python® Ultra**, 10-strand DoPar made super high strength rope for engineered applications.

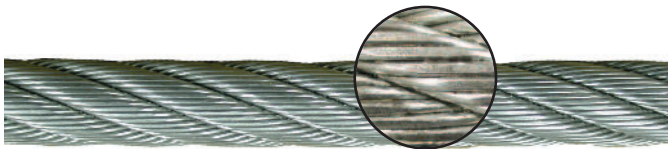


**Python® Compac 6**, very crush- yet high fatigue resistant boom hoist rope for multiple layer drum windings

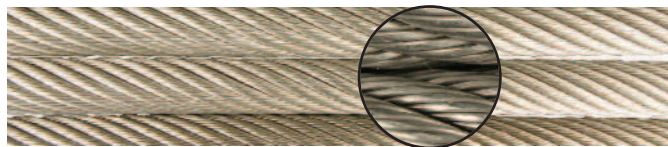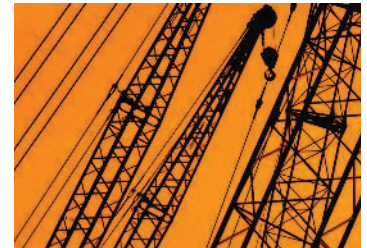



**Python® Compac 18**, rotation resistant compacted hoisting rope, extremely smooth surface for best performance on multiple winding drums, 19 wire strands, for mobile and truck cranes,

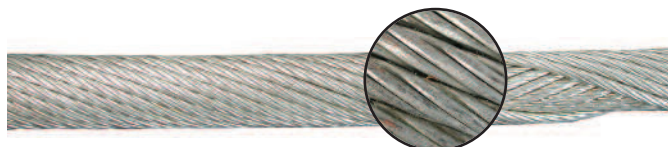

**Python® Compac 35** non-rotating type for larger mobile cranes. Die-drawn strands for better abrasion and crush resistance.




**Python® Lift**, ultra high strength non-rotating rope for large lattice boom and tower cranes.

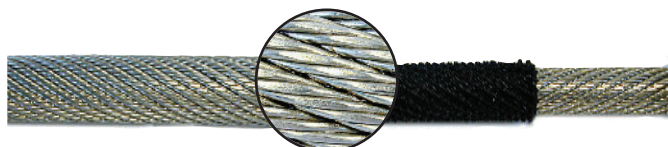

**Python® Hoist** non-rotating with plastic coated core to extend fatigue life due to shielding of core and strands. Plastic locks in factory applied lubricant.



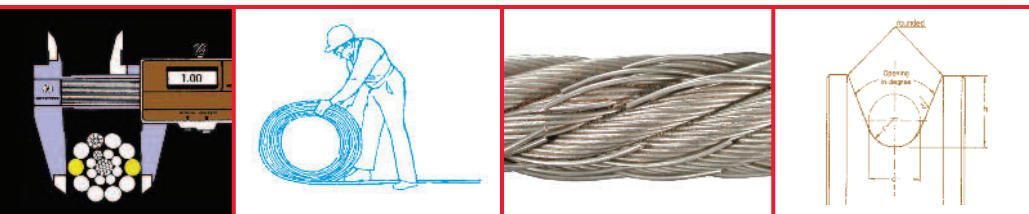

This instruction manual explains in detail some of the 'finer' points of wire rope installation, maintenance, and handling procedures and is written with the more experienced professional rope user in mind. In particular, this manual covers procedures which apply to high performance (Python®) and die-drawn (Compac®) wire rope.

Wire rope inspection never was, and never will be, a 'black or white' science. There are too many variations in the applications and in the equipment using wire rope. Although this publication makes an honest attempt to be complete, in the final analysis there is no one publication which can possibly cover all scenarios and thinkable circumstances leading to wire rope discard or damage.

## WIRE ROPE INSPECTION



### Ontario Head Office

Unirop Limited  
3070 Universal Drive  
Mississauga, ON L4X 2C8  
P: 905 624 5131  
1 800 457 9997  
F: 905 624 9265  
info@unirope.com

### Montreal

Unirop Limited  
555 Rue Gougeon  
St. Laurent, QC H4T 2B4  
P: 514 339 5444  
1 877 239 5444  
F: 514 339 5556  
quebec@unirope.com

### Edmonton

Unirop Limited  
5613 70th Street  
Edmonton, AB T6B 3P6  
P: 780 644 9000  
F: 780 644 9100  
alberta@unirope.com



WWW.UNIROPE.COM