

- In addition to routine checks for each use, PPE should regularly undergo a detailed inspection by a competent person.

Petzl recommends an inspection every 12 months and after any exceptional event in the life of the product.

- PPE inspection should be done with the manufacturer's instructions available for reference. Download the instructions at PETZL.COM



RIGGING EQUIPMENT

1. Known product history

Any PPE showing unexpected degradation should be quarantined, pending a detailed inspection.

The user should:

- Provide precise information on the usage conditions.
- Report any exceptional event regarding his PPE.

(Examples: fall or fall arrest, use or storage at extreme temperatures, modification outside manufacturer's facilities, etc.).

2. Preliminary observations

Verify the presence and legibility of the serial number and the CE mark.

Attention, the serial number code on our products is evolving. Two types of code will coexist. See below for details on each serial number code.

Code A:

00 000 AA 0000

Year of manufacture	____	____	____	____
Day of manufacture	____	____	____	____
Name of Inspector	____	____	____	____
Incrementation	____	____	____	____

Code B:


00 A 0000000 000

Year of manufacture	____	____	____	____
Month of manufacture	____	____	____	____
Batch number	____	____	____	____
Incrementation	____	____	____	____

Verify that the product lifetime has not been exceeded.


Compare with a new product to verify there are no modifications or missing parts.

3. Checking the general condition

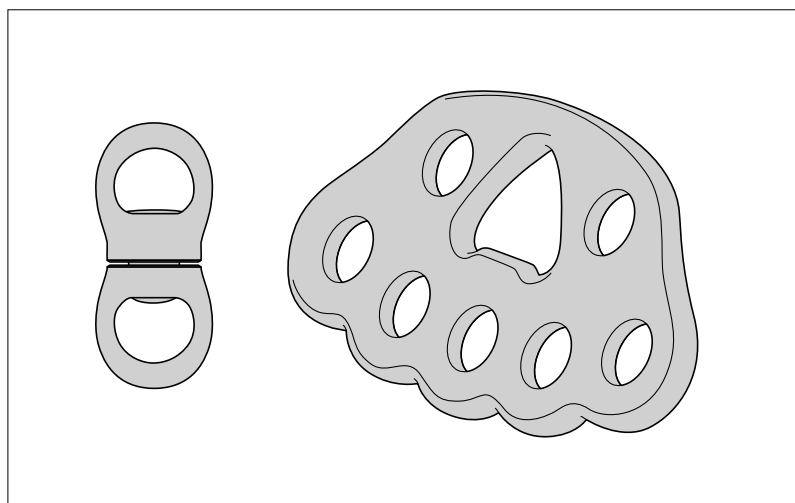


- Check the general condition of the product (marks, deformation, cracks, corrosion...).
- On the SWIVEL, verify the condition of the rivet (marks, deformation, cracks, corrosion, absence of play...).

4. Checking the attachment holes

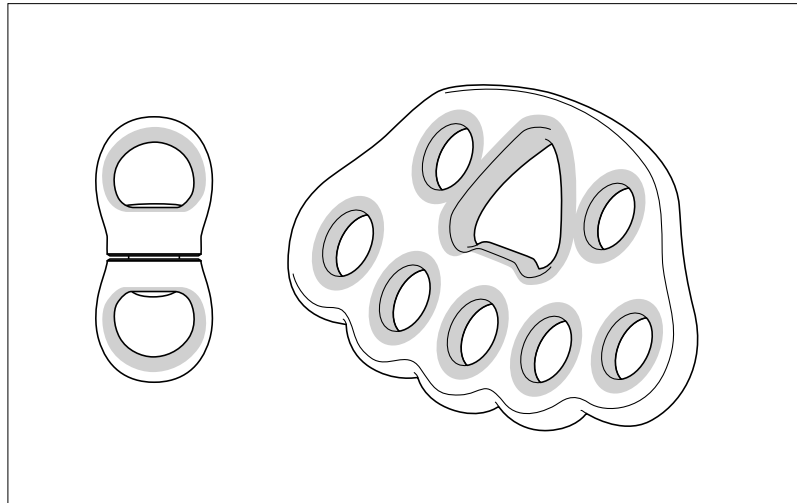

- Check the condition of the attachment holes (marks, deformation, cracks, corrosion...).

5. Function check

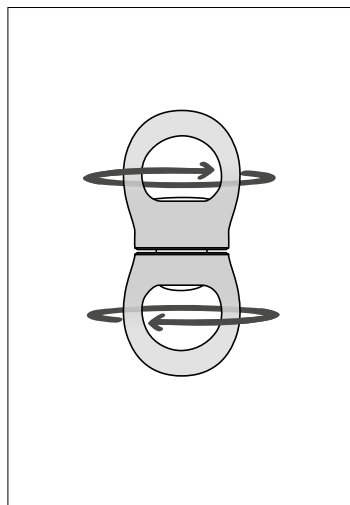

- For the SWIVEL, verify that the two parts turn freely relative to each other.