

FIXE



0082

UIAA


individually tested

EN 12278: 2007


7 < Ø < 13 mm



Pulley
Poulie

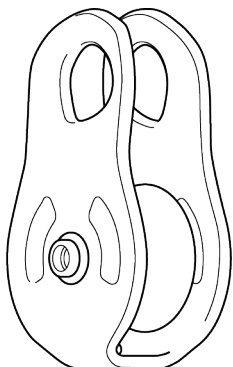


Traceability and markings Traçabilité et marquage

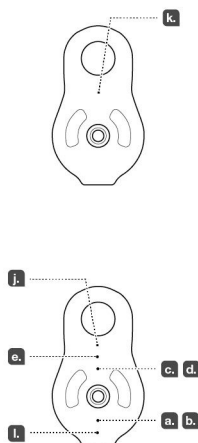

CE 0082	
a.	Body controlling the manufacture of this PPE
b.	Notified body that carried out the EU type inspection
APAVE SUDEUROPE SAS 8 rue Jean-Jacques Vernazza Z.A.C. Saumaty-Séon - CS 60193 13322 Marseille CEDEX 16 N°0082	
c.	Traceability: datamatrix
d.	Diameter
e.	Serial number
YY M 0000000 000	
f.	Year of manufacture
g.	Month of manufacture
h.	Batch number
i.	Individual identifier
j.	Standards
k.	Carefully read the instructions for use
l.	Manufacturer address

1. Field of application (text part) Champ d'application (partie texte)

2. Nomenclature Nomenclature

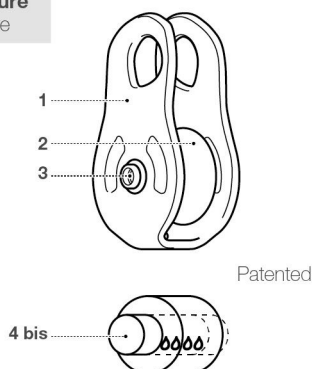



3. Inspection, points to verify Contrôle, points à vérifier



PPE checking
Vérification EPI
PETZL.COM




4. Compatibility Compatibilité




5. Strength Résistance


5A. Working load limit Valeur d'utilisation maxi




5B. Breaking load Charge de rupture



6A. Simple pulley system

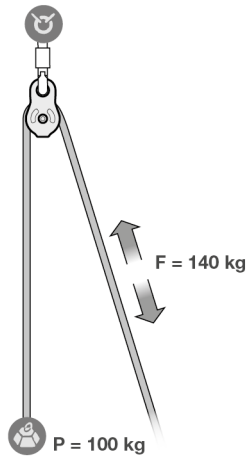

with progress capture

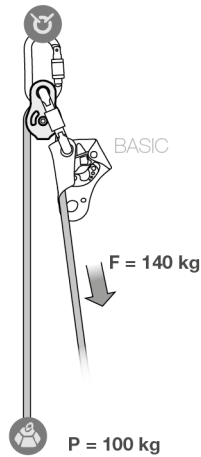

Theoretical
force




$$F = P$$

$$F = 1,4 P$$

$$F = 2 P$$

6B. 2:1 hauling system

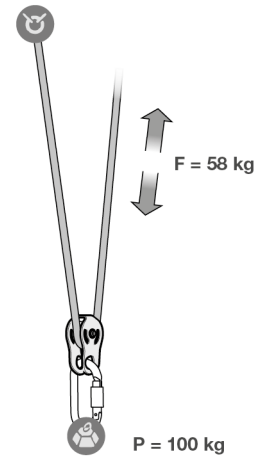


$$F = 0,5 P$$


$$F = 0,58 P$$

$$F = 0,66 P$$

6C. 3:1 hauling system with progress capture

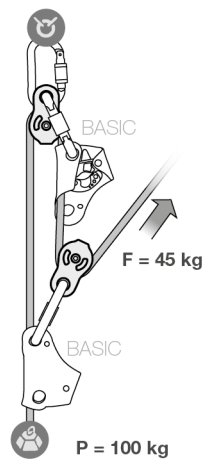

Theoretical
force




$$F = 0,33 P$$

$$F = 0,45 P$$

$$F = 0,57 P$$

7. Progress capture systems Systèmes anti-retour

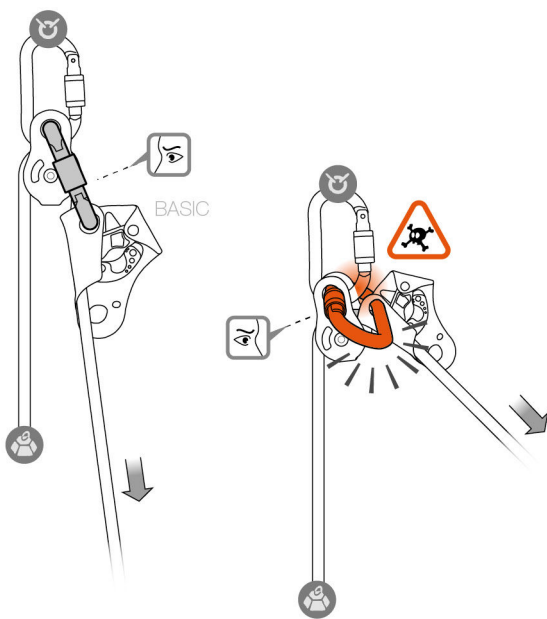

8. Positioning and redirection Positionnement et renvoi

